HITACHI
Inspire the Next

PRODUCT CATALOGUE

Power Tools and Power Tool Accessories

2012

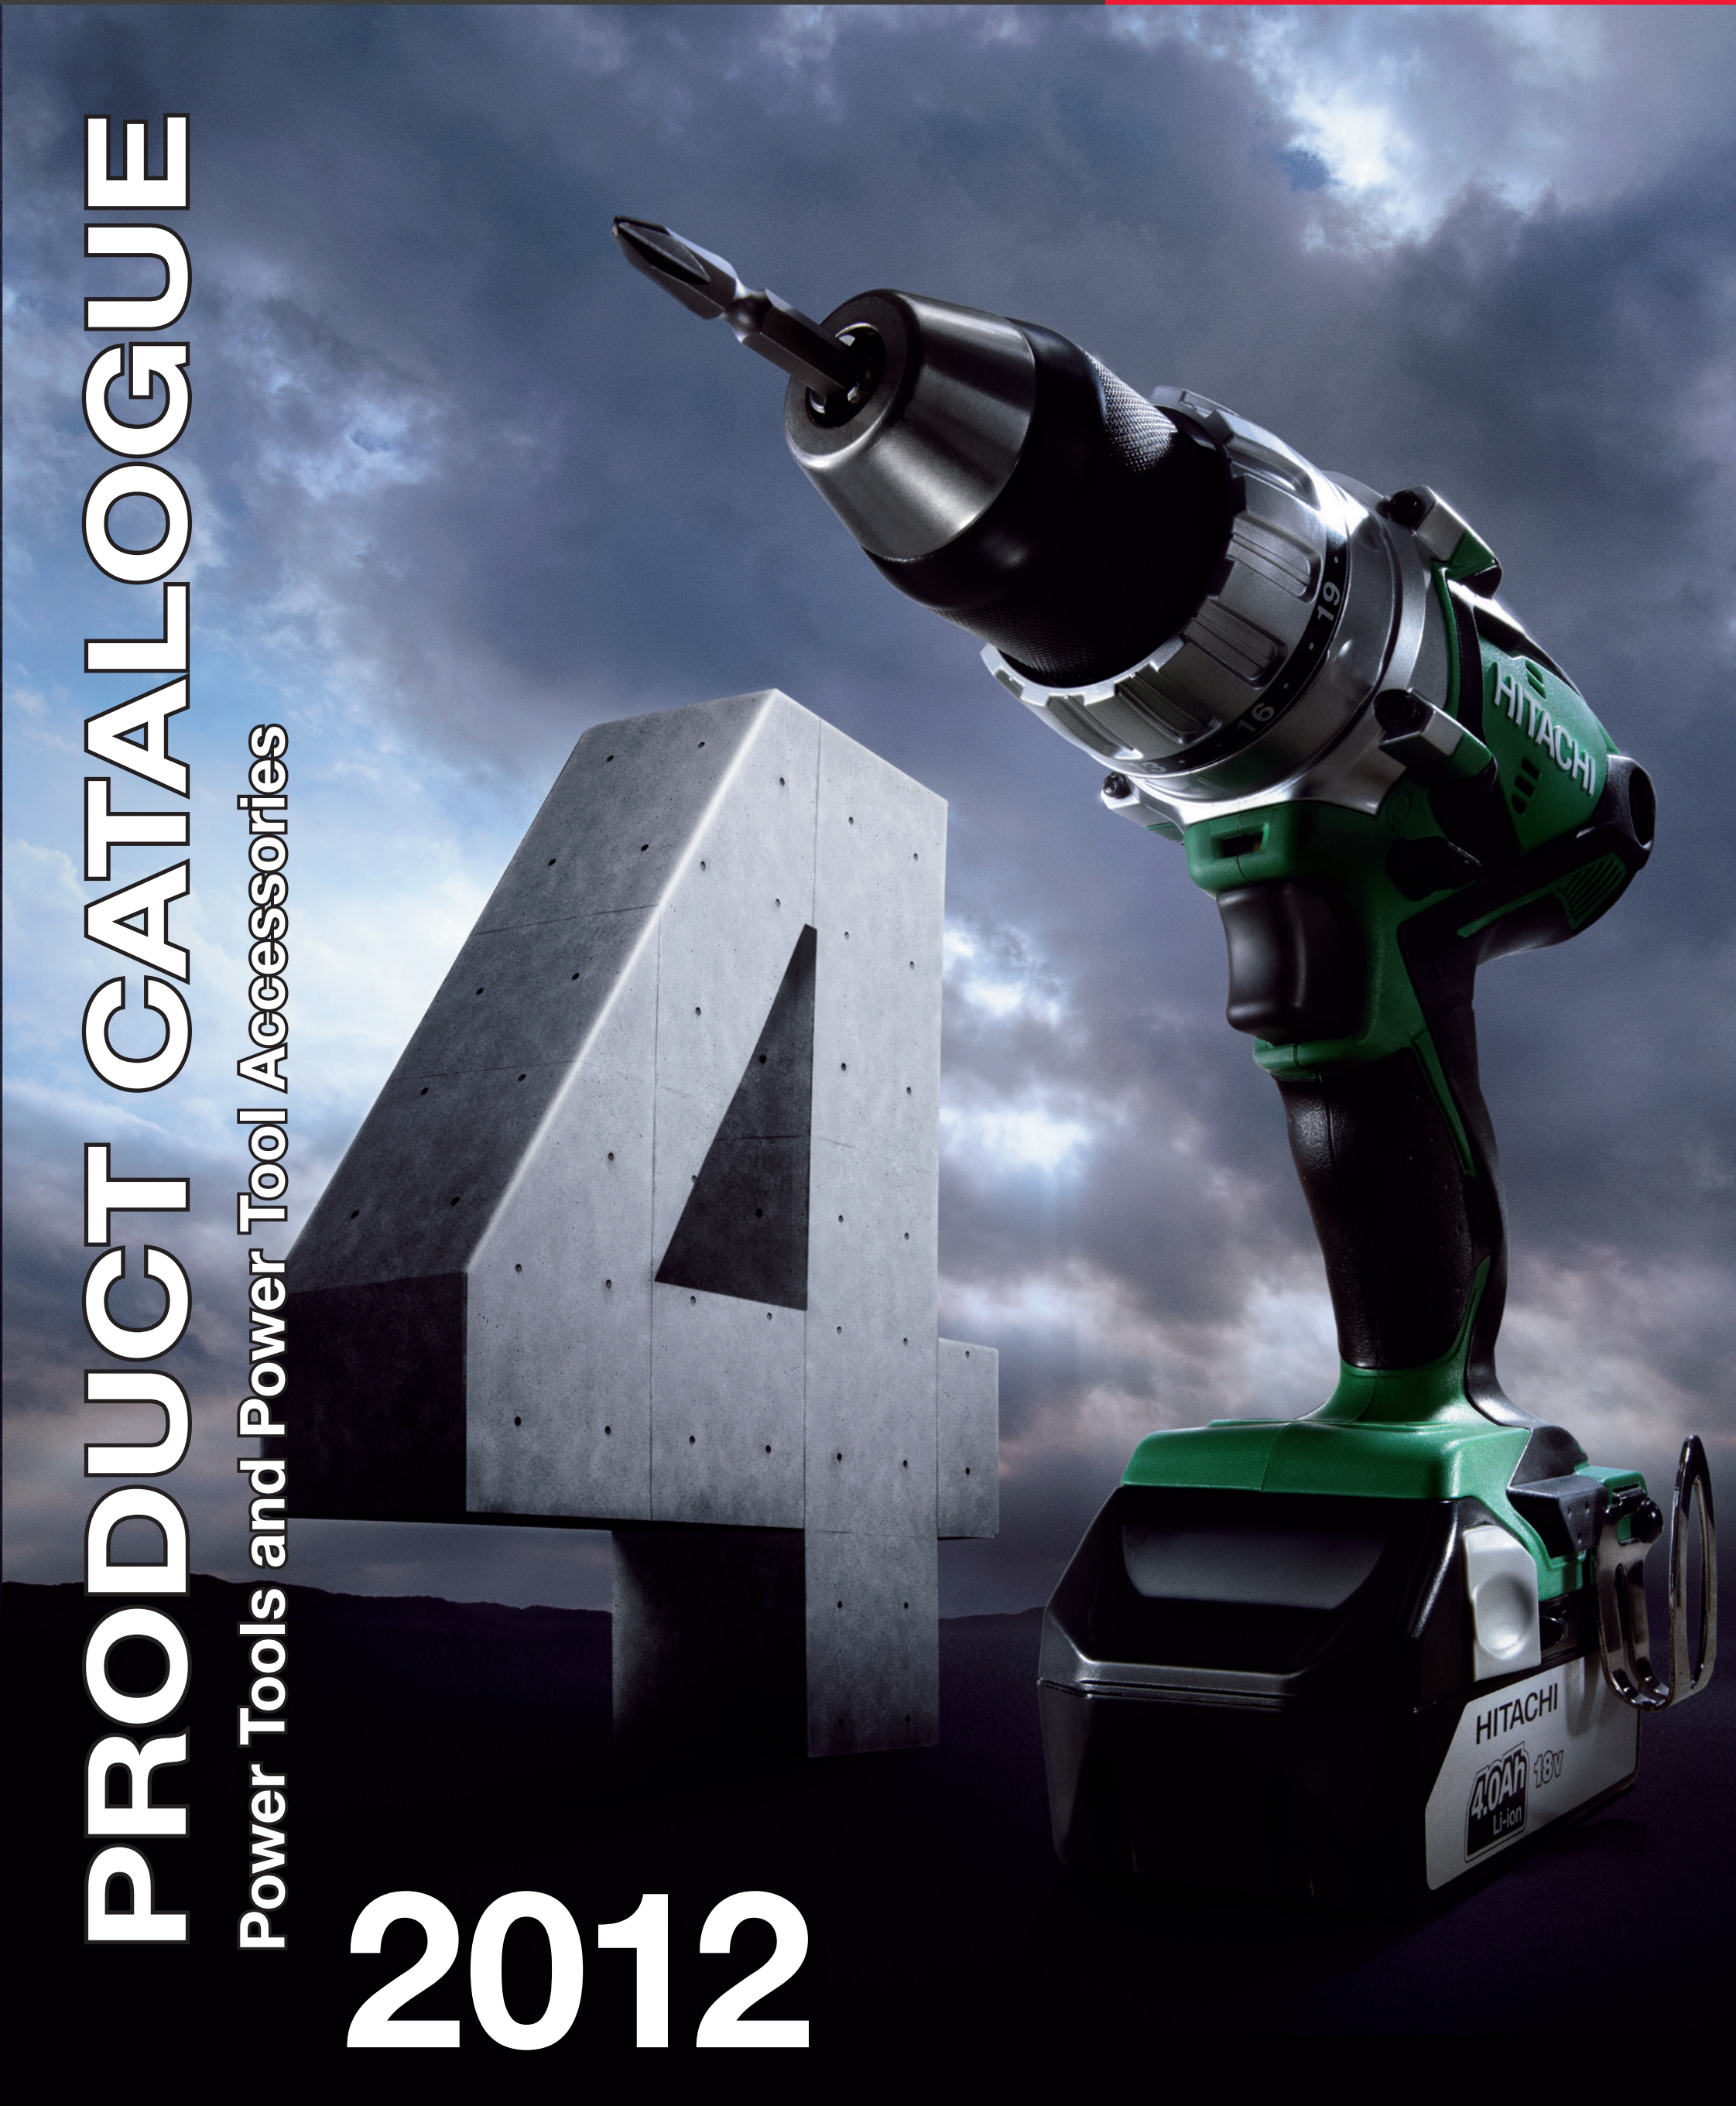
4
19
16
HITACHI
HITACHI
4.0Ah
18V
Li-ion

HITACHI

3 YEAR LITHIUM-ION TOOL WARRANTY*

NOW INCLUDES 4.0Ah BATTERIES

Terms & conditions apply

Now more than ever, you need tools you can rely on.

Hitachi Power Tools offer an extended warranty on selected Li-Ion tools when registered within 4 weeks of purchase.
This now includes the full range of 4.0Ah Li-Ion tools, including 4.0Ah battery packs. Simply visit www.hitachi-powertools.co.uk and complete the registration form supplied.

What does the extended warranty cover?
We undertake to replace or repair any part found to be defective in material or workmanship, within 24 months (15 months for Hire Fleets) of delivery to the original purchaser.

What is not covered?

- Defects arising from neglect, misuse or accident, except as provided by statute.
- Accessories and other consumable items.
- NiCad and NiMH cordless tools and batteries

How do I get my tool repaired?
Contact your nearest Hitachi authorised service agent. You can find this on our website or by calling us on 01908 660663. You will need to provide your proof of purchase and warranty registration number to the service agent.

What Li-Ion tools are not covered by the warranty?
1.5Ah, 2.0Ah and 3.0Ah Li-Ion batteries are not covered by the warranty.
Cordless gas nailers are not covered by the extended warranty.
Promotional lines such as the DV18DCL2 are not covered.

18V Lithium-Ion Cordless Tools 9
18V Lithium-Ion Cordless Kits 17
3.6V Lithium-Ion Cordless Tools 18
10.8V Lithium-Ion Cordless Tools 18
10.8V Lithium-Ion Kits........20
14.4V Li-Ion & Body only Cordless Tools........21
18V Plug-in Cordless Tools - Body Only........22
Cordless Hammer Drills 23
NiCad Cordless Tools........24
Li-Ion Batteries & Chargers........25
NiCad & NiMH Batteries & Chargers 26
Rotary Drills........27
Impact Drills 28
Screwdrivers........29
Drill Bit Sets........30
Chucks & Adapters 30
SDS-Plus Rotary Hammer Drills 31
SDS-Max Rotary Demolition Hammers 32
SDS-Plus & SDS-Max Demolition Hammers........33
Heavy Duty Breakers........33
SDS-Plus & SDS-Max Drill Bits........34
Angle Grinders........35
Die Grinder 39
Disc Cutters........39
Nibbler & Shear 40
Rebar Cutter/Bender 40
Corded Impact Wrenches 40
Grinding Wheels & Diamond Wheels........41
Grinder Accessories........42
Mitre Saws........43
Circular Saws 45
Jigsaws........47
Reciprocating Saws 47
Routers........48
Laminate Trimmer........48
Planers........49
Orbital Sanders 49
Belt Sanders........50
Rotary Orbital Sander........50
Sander/Polisher........50
Reciprocating Saw Blades and Jigsaw Blades 51
Saw Blades and Router Accessories........52
Cordless Nailers 53
Gas Nailer Consumables........54
Pneumatic Nailers & Compressor........55
Wet/Dry Dust Extraction & Blower 56

Index

B
BCL-10UA 18
C
C7BU2 45
C7SB2 45
C7ST 45
C7U2 45
C7UY 46
C8FSE 44
C9BU2 45
C9U2 45
C10FCE2 43
C10FCH2 43
C12FCH 43
C12LC 43
C12LCH 43
C12RSH 44
C18DL/L4 22
C18DSL/JV 13
C18DSL/JW 13
C18DSL/L4 13
CC14SF 39
CD7SA 39
CE16SA 40
CJ14DL/L4 21
CJ18DL/L4 23
CJ18DSL/JV 13
CJ18DSL/JW 13
CJ18DSL/L4 13
CJ90VST 47
CJ110MV 47
CJ120V 47
CL14DSL 21
CM5SB 39
CM9SR 39
CM12Y 39
CN16SA 40
CR10DL/JL 19
CR10DL/L4 19
CR13V2 47
CR13VBY 47
CR18DL/L4 22
CR18DSL/JV 13
CR18DS L/JW 13
CR18DSL/L4 13
D
D6SH 27
D10VC2 27
D10VF 27
D10YB 27
D13 27
D13VF 27
DB3DL2 18
DB10DL 18
DH14DL/L4 21
DH18DL/L4 22
DH18DSL/JV 12
DH18DSL/JW 12
DH18DSL/L4 12
DH24DVA/JC 23
DH24DVC 23
DH24PB3 31
DH24PC3 31
DH24PM 31
DH25DAL 23
DH25PB 31
DH28PC 31
DH28PD 31
DH36DAL 23
DH38MS 32
DH40MR 32
DH40MRY 32
DH45MR 32
DH50MR 32
DH50MRY 32
DN12DY 24
DS10DFL 18
DS12DVF3 24
DS14DVF3/JD 24
DS14DVF3/JR 24
DS18DBL/JV 12
DS18DBL/JW 12
DS18DBL/L4 12
DS18DSDL/JB 12
DS18DSDL/JV 12
DS18DSDL/JW 12
DS18DSDL/L4 12
DV16V 28
DV18DBL/JV 11
DV18DBL/JW 11
DV18DBL/L4 11
DV18DL2/L4 22
DV18DSDL/JB 11
DV18DSDL/JV 11
DV18DSDL/JW 11
DV18DSDL/L4 11
DV18DSFL/JB 11
DV18DSFL/JQ 11
DV18V 28
DV20VB2 28
E
EC58 55
F
FDV16VB2 28
G
G10SR3 35
G12S2 35
G12SE2 35
G12SR3 35
G12SR3/CD 37
G12SS 35
G12SS/CD 37
G13SB3 36
G13SC2 36
G13SE2 36
G13YC 36
G14DL/L4 21
G18DL/L4 23
G18DSL/JV 16
G18DSL/JW 16
G18DSL/L4 16
G18SE3 38
G23MR 38
G23SC3 38
G23SS 38
G23SS/CD 37
G23UB2 38
GP2S2 39
H
H25PV 33
H45MR 33
H45MRY 33
H60MRV 33
H65SD2 33
H70SD 33
K
KC10DFL 20
KC18DKL/JA 10
KTL310DD/AID 20
KTL310DD/ID 20
KTL410DD 20
KTL410ID 20
KTL418S/JW 17
KTL510 20
KTL518S/JW 17
KTL618SJ/JW 17
KTL618S/JW 17
KTL718S/JW 17
KTL918S/JW 17
M
M6SB 48
M8V2 48
M12SA2 48
M12V2 48
M12VE 48
N
NC40G 53
NR90GC2 53
NR90GR2 53
NT50AE2 55
NT50AE2K 55
NT65GB 53
NT65GS 53
NV50A1 55
NV50AH 55
NV90AB 55
P
P20SA2 49
P20SF 49
Q
QB35E 56
R
R18DL 24
R18DSL 16
RB40VA 56
S
SAT180 50
SAY150A 50
SB8V2 50
SB10V2 50
SP18VA 50
SV12SD 50
SV12SG 49
SV13YA 49
U
UB18DAL 16
UB18DSL 16
UR10DL 18
UR18DSL 16
UU610CZ 44
V
VB16Y 40
W
W6V4 29
W6VB3 29
W6VM 29
W8VB2 29
WH10DCL/JL 19
WH10DCL/L4 19
WH10DFL/JL 18
WH10DL/JL 19
WH10DL/L4 19
WH14DAF2/JR 24
WH14DCAL/JL 21
WH14DCAL/L4 21
WH18DBDL/JV 14
WH18DBDL/JW 14
WH18DBDL/L4 14
WH18DL/L4 22
WH18DSAL/JV 14
WH18DSAL/JW 14
WH18DSAL/L4 14
WR16SA 40
WR18DBDL/JV 14
WR18DBDL/JW 14
WR18DBDL/L4 14
WR18DSHL/JV 15
WR18DSHL/JW 15
WR18DSHL/L4 15
WR22SA 40

Hitachi Leading Edge Technologies For The Next Stage

4.0Ah LITHIUM-ION BATTERIES

Up To 200% Run Time Of 3.0Ah Batteries

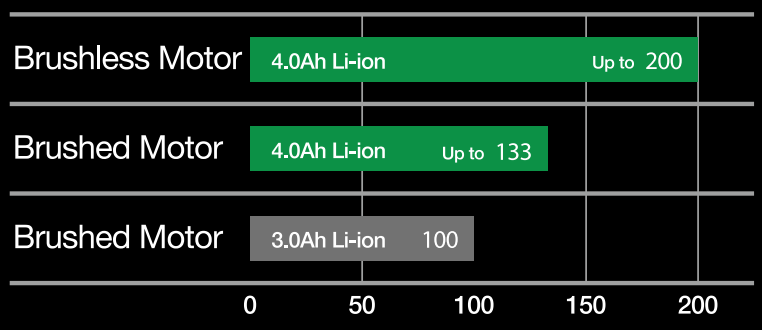
Comparison of Runtime per Charge

* A comparison between the model DS18DBL (BSL1840) with brushless motor and the model DS18DSL (BSL1840/BSL1830) with brushed motor. The numbers in the chart are relative and theoretical values when the runtime per charge of the model DS18DSL (BSL1830) is indexed at 100.

Lightweight

Same size and weight as 3.0Ah batteries but greater capacity

Safety & Long Battery Lifetime

Thanks to Multiplex Protection Circuit that prevents over-load, over-charge and over-discharge.

Slim Grip Handles

Provide more control thanks to slide type battery design.

Full Compatibility

Compatible with Hitachi’s other 18V slide lithium-ion batteries.

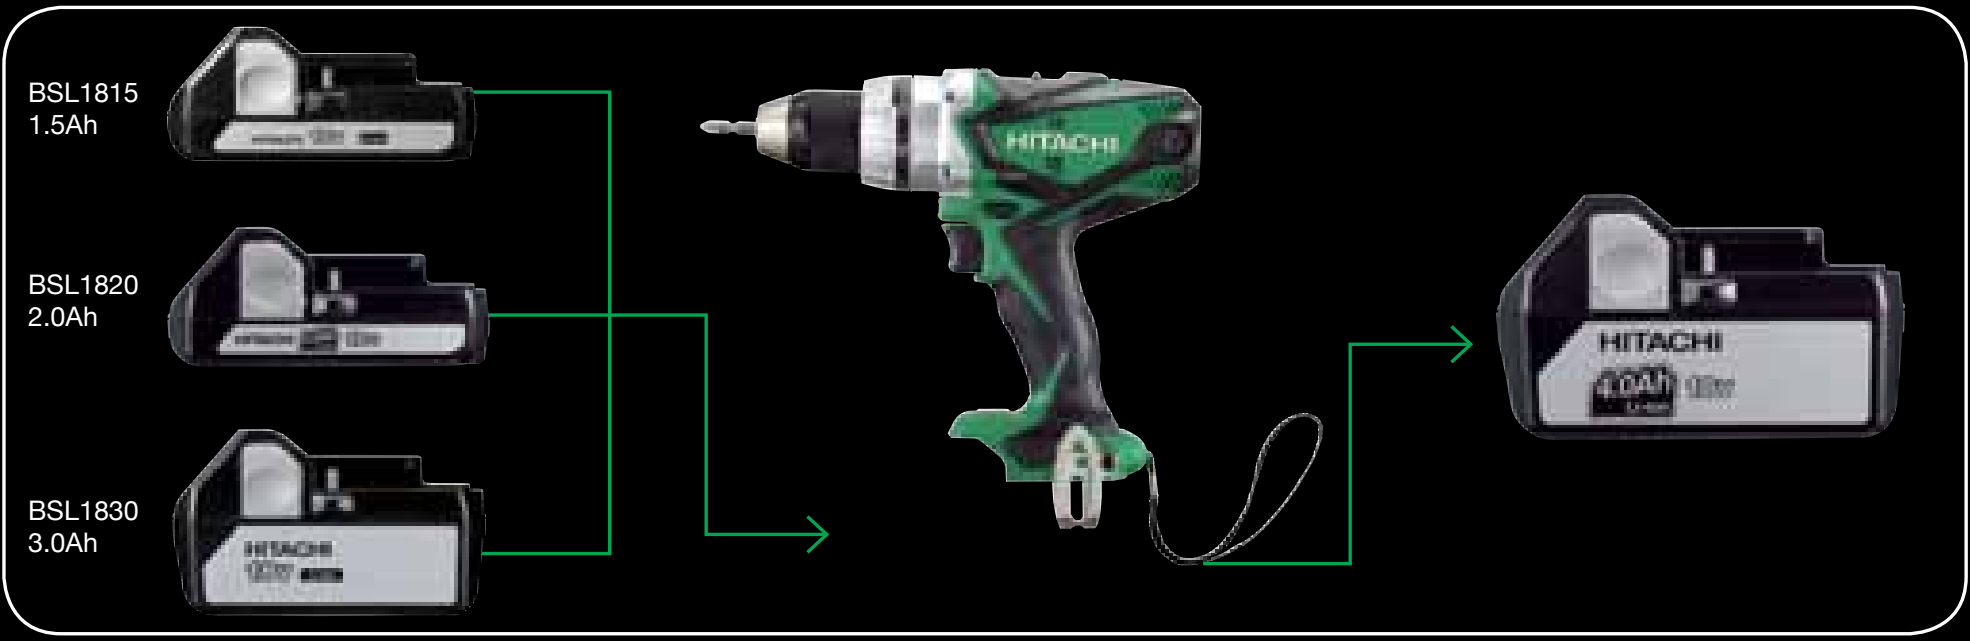

Explanation of Symbols

- Double insulated
- Electric brake
- Electronic soft start
- Electronic constant speed control
- Reverse facility
- Variable speed
- Two speed motor
- Shock absorbing handle
- Orbital action
- Spindle lock
- Random orbit action
- Through base dust extraction
- Brushless motor

Misuse of power tools can damage batteries and shorten their working life

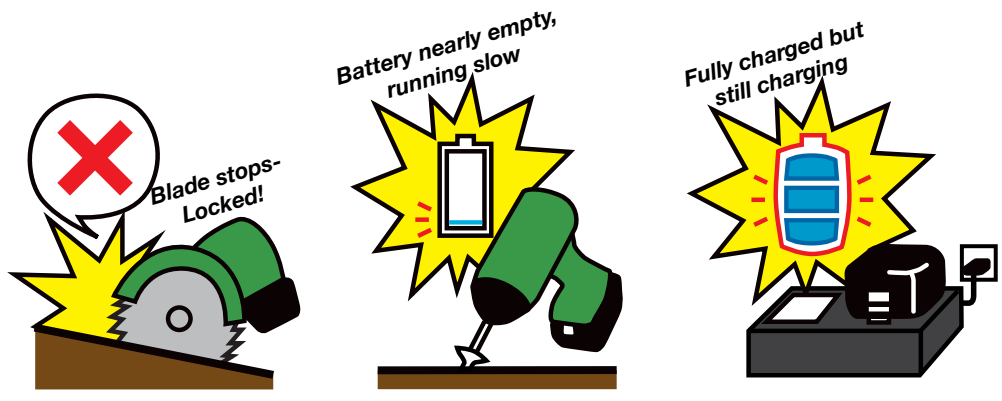
Blade stops- Locked!
Battery nearly empty, running slow
Fully charged but still charging

Overload ***Over-discharge*** ***Over-charge***

Multiplex Battery Protection Circuit

Hitachi's Multiplex Protection Circuit protects both battery and user

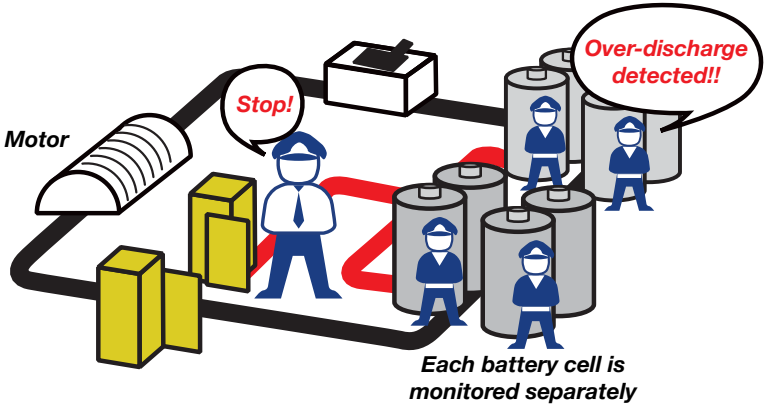
Motor
Stop!
Over-discharge detected!!
Each battery cell is monitored separately

Hitachi power tools and chargers stop safely to prevent damage to batteries and extend working life

Important notice - batteries for Hitachi cordless power tools

Please always use genuine Hitachi batteries. We cannot guarantee the safety and performance of our cordless power tools when used with batteries other than those designated by us, or when the battery is disassembled and modified (such as disassembly and replacement of cells or other internal parts).

Lighter Weight

Hitachi Li-Ion batteries are 40% lighter than Ni-MH batteries, allowing longer use and greater control.

Long Service Life

Unique protection circuitry in Hitachi Li-Ion batteries prevents overload, overcharge and high discharge, giving them up to 260% longer service life than similar batteries.

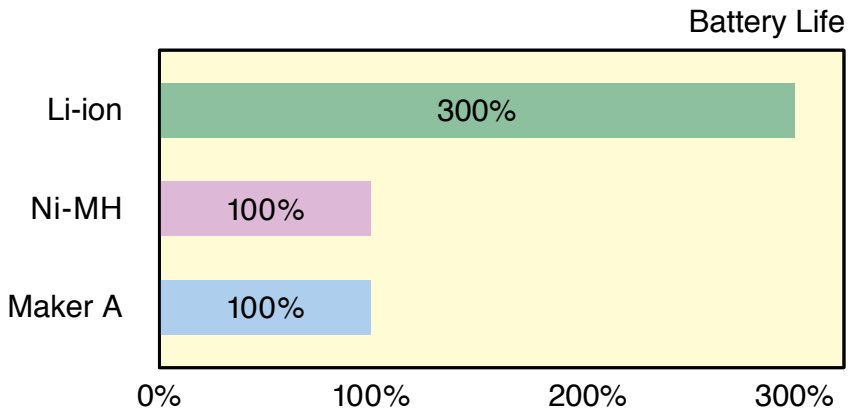

Environmentally Friendly

Hitachi Li-Ion batteries contain no harmful Cadmium, making them better for the environment.
Also, Hitachi Li-Ion batteries have an extremely low self-discharge rate. If a battery is not used, the battery charge will drop by only 5% in 40 days, meaning that less energy is needed to recharge it.
Finally, Hitachi Li-Ion batteries have no memory effect, making it possible to top up the battery charge at any time.

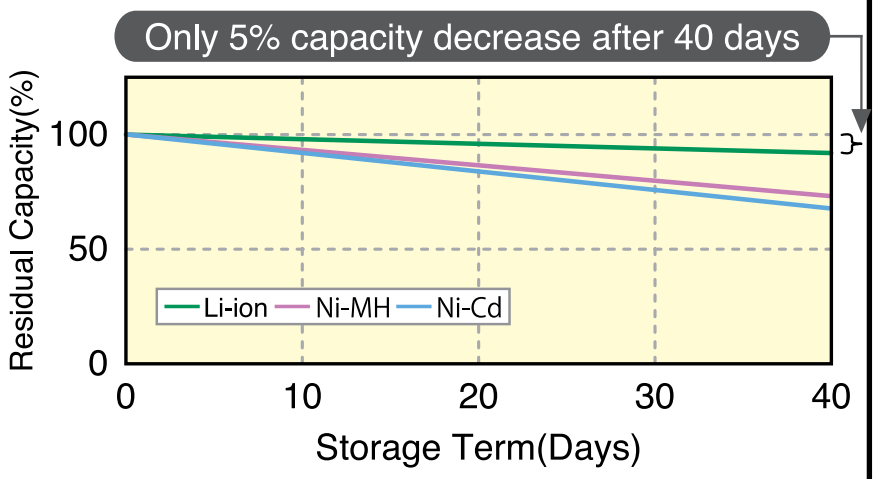

New Slide-on Battery Cordless Range

The new DSL range from Hitachi Power Tools feature ultra slim handles for extra comfort and ease of use, thanks to the all new design slide on batteries. Extra battery terminals allow greater flexibility in the provision of new features such as an integral LED spotlight and all electronic switch.
These new batteries also offer increased safety thanks to their slide on design, which gives a solid and secure contact at all times.

Features of the New Slide On Cordless Range

Slimline grip. Thanks to the new battery design the handles of the DSL range are ultra slim.
All Electronic Switch - a redesigned switch allows greater control at lower speeds.
LED Spotlight - An integral spotlight with handy on/off button situated at the base of the tool. To save energy, the spotlight automatically switches of after 15 minutes of inactivity.
Battery Level Indicator - A simple press button indicator shows the amount of power left in the battery.

SLIDE-ON BATTERIES

LED SPOTLIGHT

Battery Indicator
🟥🟥 **Charged**
☐🟥 **Half Charge**
☐☐ **Recharge Now**

Highly Efficient and Durable Brushless Motor Tools

The Hitachi Next Generation Motor

Hitachi's products are opening up a new world of power tools by offering high efficiency, economy, reliability and outstanding performance, based on advanced electronic control technology.
The latest models integrate the newly developed brushless motor, high performance lithium-ion batteries and advanced electronic control technology.

Approximately 150% efficiency compared to Hitachi’s conventional brushed motors

Reaches up to 200% runtime per charge in combination with a 4.0Ah lithium-ion battery

Brushless Motor Technology

Brushless motors turn much more efficiently than conventional motors with less electrical loss and friction resistance. Brushless motors are around 30% more efficient than conventional motors. Brushless motors also generate less heat than conventional motors, which allows improved dust proofing and longer service life.

An expanding line-up of products with brushless motors

DV18DBL
Combi Drill

DS18DBL
Drill/Driver

WH18DBDL
Impact Driver

WR18DBDL
Impact Wrench

Hitachi's new range of low vibration power tools are designed to meet new standards of vibration reduction, combined with class leading operating performance.

UVP
USER VIBRATION PROTECTION

DH40MRY
Low Vibration SDS-Max Rotary Demolition Hammer

H45MRY
Low Vibration SDS-Max Demolition Hammer

DH50MRY
Low Vibration SDS-Max Rotary Demolition Hammer

CR13VBY
Low Vibration Reciprocating Saw

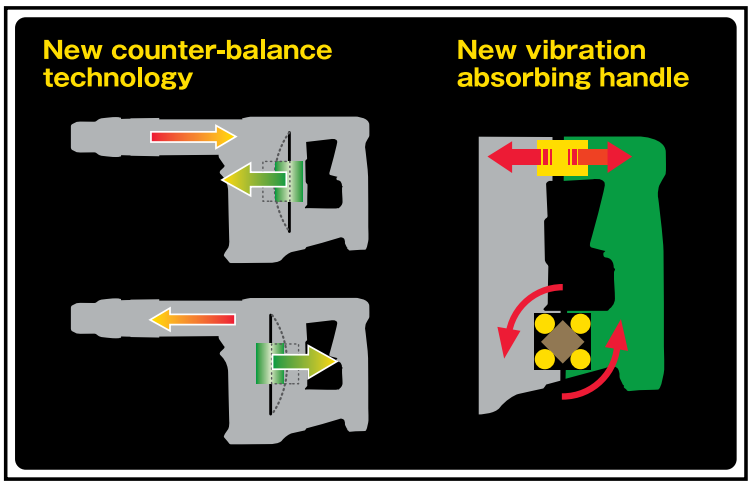
New counter-balance technology
New vibration absorbing handle


UVP
USER VIBRATION PROTECTION


Without UVP System

Operating vibration is reduced by a leaf spring counter-balance and a shock absorbing handle that contains four dampers at both the top and bottom connection joints.

Vibration information for Hitachi power tools can be found at www.Low-Vibration.com

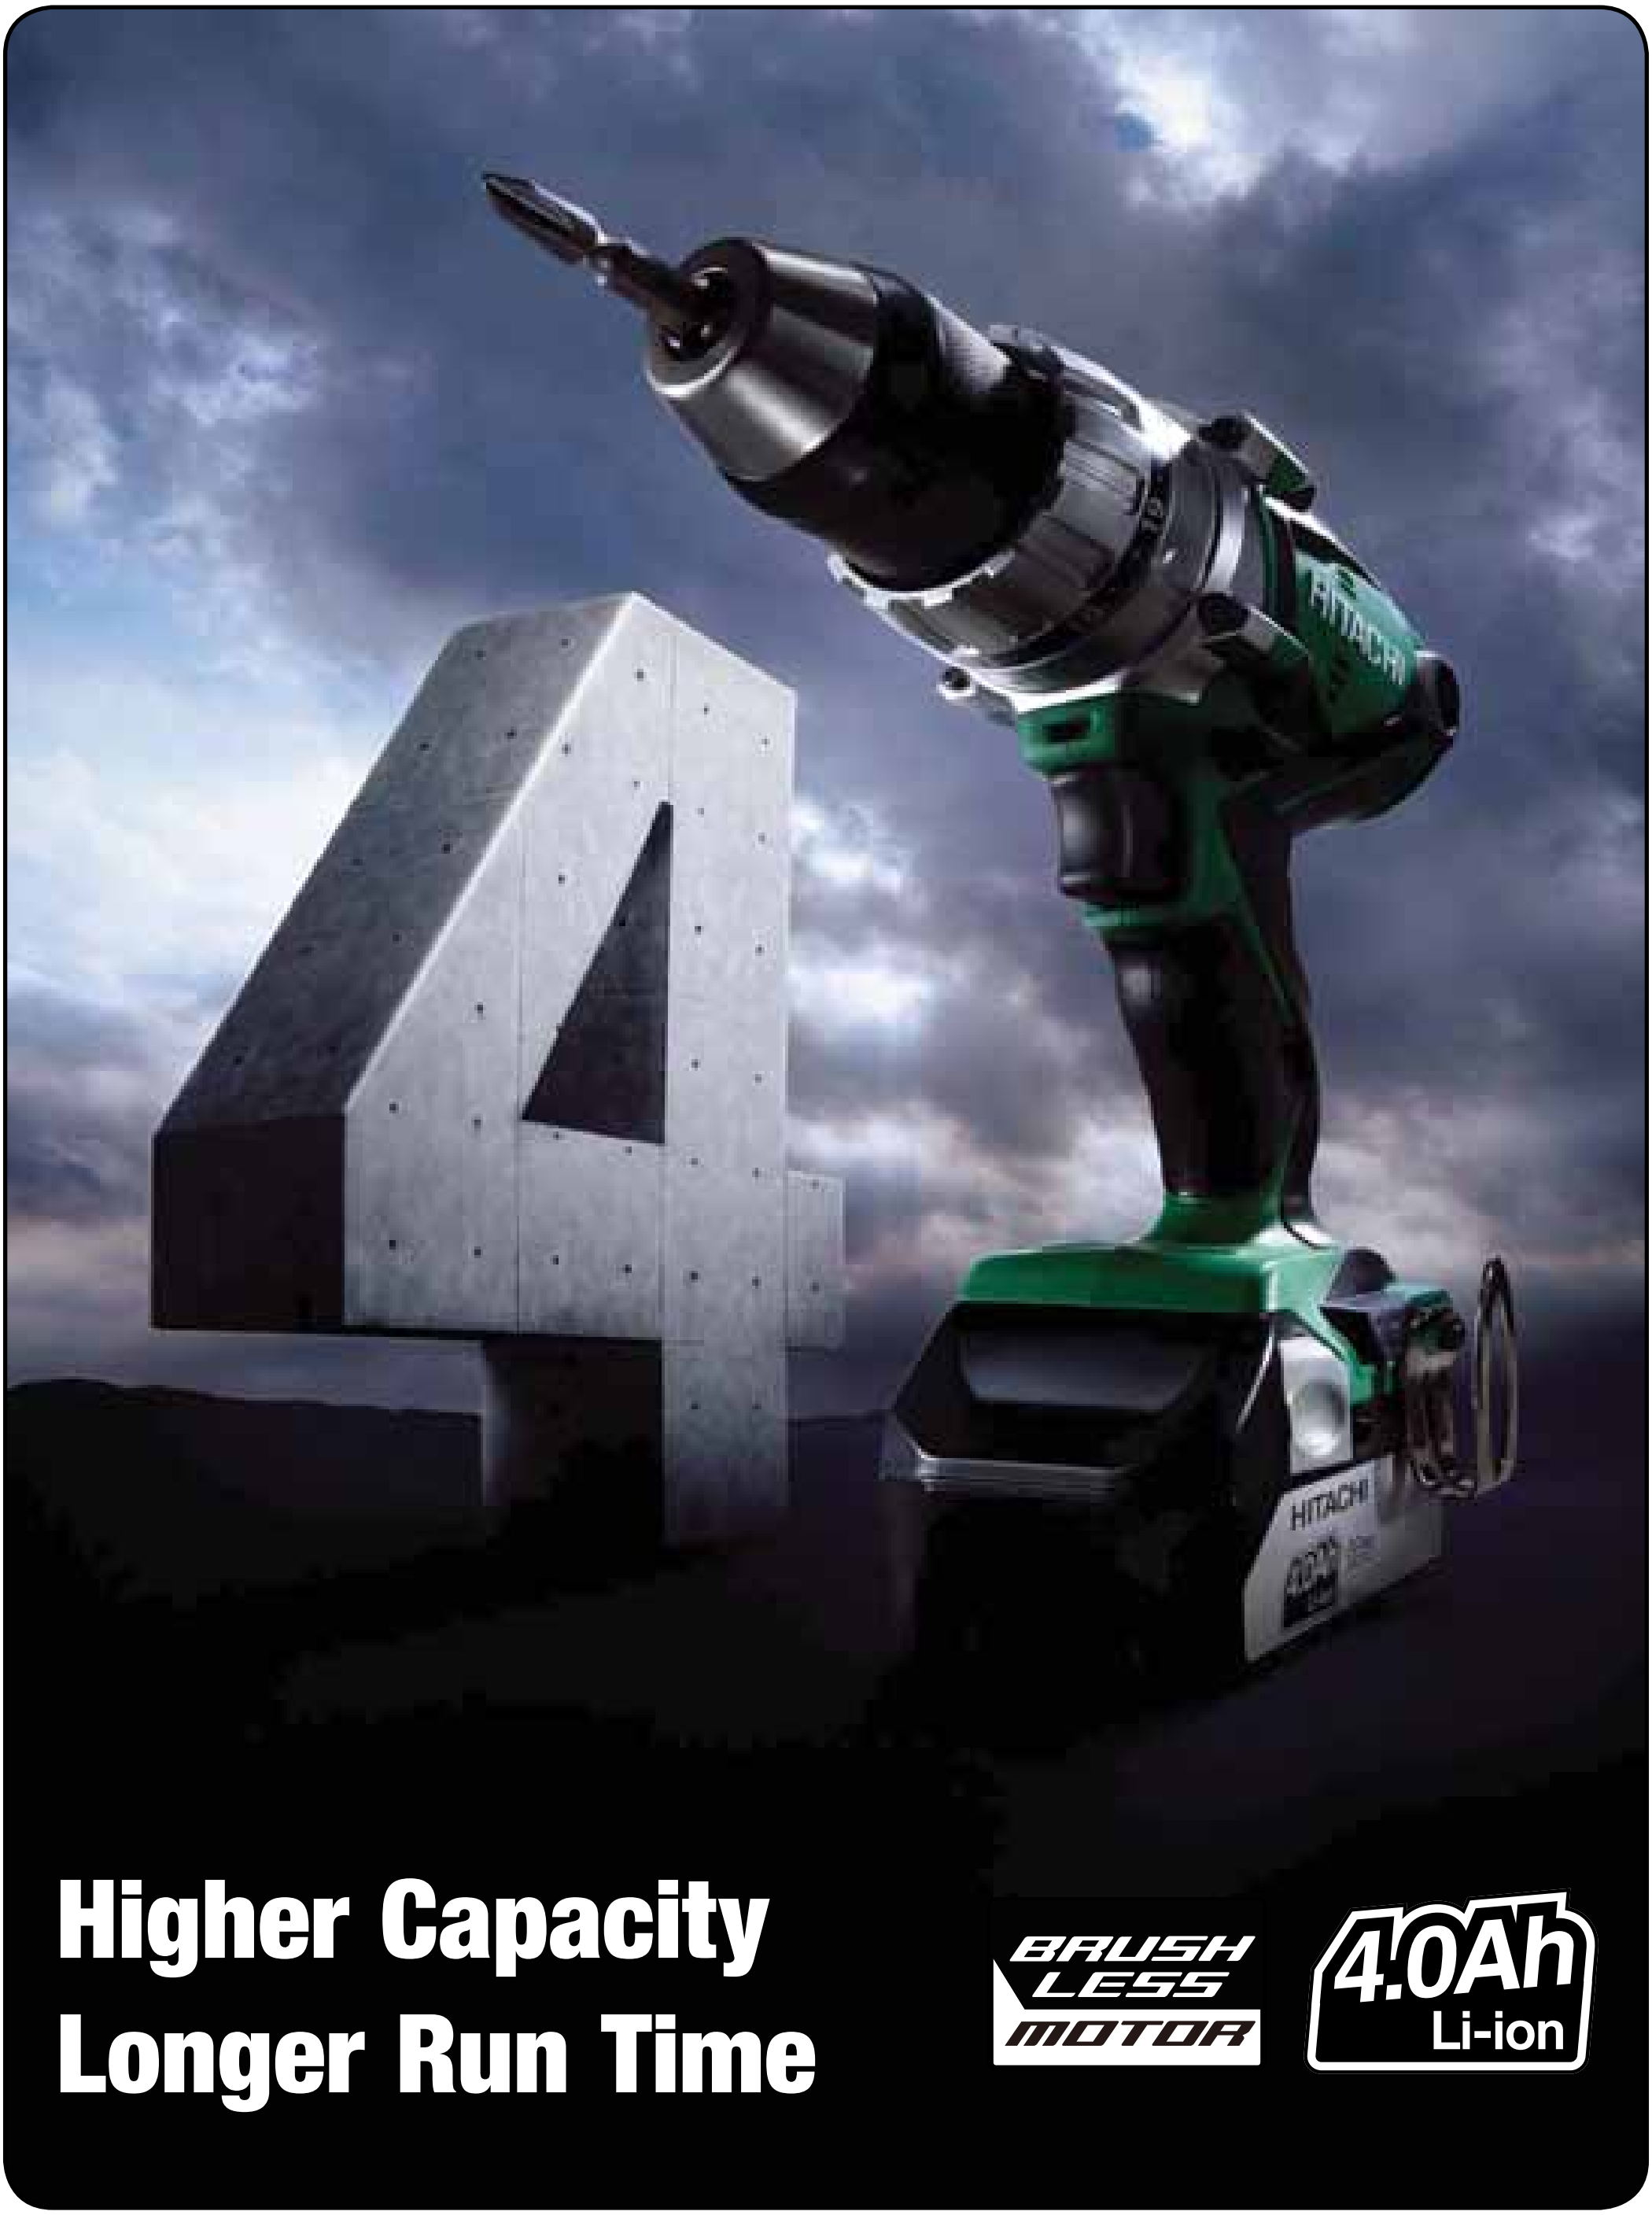
HITACHI
HITACHI
Higher Capacity
Longer Run Time
BRUSH LESS MOTOR
4.0Ah
Li-ion

DV18DSDL/JW
18V Combi Drill with 4.0Ah Li-Ion Batteries

NEW

- New design combi drill with extremely high maximum torque of 92Nm
- All new gear system with needle bearings and heat-treated components for extreme durability
- Carbide tipped chuck jaws for excellent grip
- 2 speed gearbox with improved switch
- Super bright white LED with auto-off function to save energy
- Battery level indicator
- 13mm metal Jacobs chuck with ratcheting lock
- Spindle lock
- Raised body mouldings for extra protection against dust and dirt
- Slimline soft grip handle
- Forward & reverse switch
- Metal belt clip can be fitted for right-handed or left-handed use

92 Nm

3 HITACHI YEAR LITHIUM-ION TOOL WARRANTY*
NOW INCLUDES 4.0Ah BATTERIES
Terms & conditions apply

4.0Ah Li-ion

KC18DKL/JA
18V Twin Pack

NEW

HITACHI
HITACHI
HITACHI
4.0Ah 18V
Li-ion
HITACHI
4.0Ah 18V
Li-ion

- High performance twin pack featuring:
- DV18DSDL combi drill (see page 11)
- WH18DSAL impact driver (see page 14)
- 2 x 4.0Ah Li-Ion batteries
- UC18YRSL fan cooled charger
- Side handle
- Driver bit
- Carrying case

3 HITACHI YEAR
LITHIUM-ION TOOL
WARRANTY*
NOW INCLUDES 4.0Ah BATTERIES

Terms & conditions apply

4.0Ah
Li-ion

KC18DKL/JA
2 x 4.0Ah Li-Ion batteries
UC18YRSL charger
Side handle, driver bit & carrying case

DV18DSDL
18V Combi Drill

NEW

4.0Ah Li-ion

STOP HIGH LOW

- Extremely high torque of 92Nm
- Slimline soft grip
- Fan cooled charger
- Battery level indicator
- Super bright white LED
- Single sleeve metal chuck with ratcheting lock
- Spindle lock
- Variable speed & reverse

Capacity:		
	Wood	65mm
	Metal	13mm
	Brick	16mm
Chuck capacity		13mm
Charge Time For 4Ah Battery		60 minutes
Maximum Torque		92Nm
No-Load Speed		0-400/1800/min
Full Load Impact Rate		0-6000/27000/min
Torque settings		22
Overall Length		235mm
Weight		2.2kg

DV18DSDL/JW
2 x 4.0Ah Li-Ion batteries
UC18YRSL fan cooled charger
Side handle, driver bit, carrying case

DV18DSDL/JV
1 x 4.0Ah Li-Ion battery
UC18YRSL fan cooled charger
Side handle, driver bit, carrying case

DV18DSDL/JB
2 x 2.0Ah Li-Ion batteries
UC18YRSL fan cooled charger
Side handle, driver bit, carrying case

DV18DSDL/L4
Body only
Side handle & driver bit included

92 Nm

DV18DBL
18V Combi Drill with Brushless Motor

NEW

4.0Ah Li-ion

STOP HIGH LOW BRUSH LESS MOTOR

- Compact drill/driver with brushless motor technology
- Highly efficient brushless motor increases working time by 40%
- No carbon brushes to replace
- Longer service life and greatly increased switch life
- Maximum torque of 74Nm
- Electronic switch requires less pulling force for greater control
- 4 stage adjustable rotation speed and a 2 speed gearbox for a wide range of drilling speeds to suit all applications

Capacity:		
	Wood	36mm
	Metal	13mm
	Brick	16mm
Chuck capacity		13mm
Charge Time For 4Ah Battery		60 minutes
Grip Circumference		118mm
No-Load Speed		0-1000/1300/ 1500/1800/min
Full Load Impact Rate		0-6000/27000/min
Torque settings		22
Maximum Torque		74Nm
Overall Length		220mm
Weight		2.2kg

DV18DBL/JW
2 x 4.0Ah Li-Ion batteries
UC18YRSL fan cooled charger
Side handle, driver bit, carrying case

DV18DBL/JV
1 x 4.0Ah Li-Ion battery
UC18YRSL fan cooled charger
Side handle, driver bit, carrying case

DV18DBL/L4
Body only
Side handle & driver bit included

DV18DSFL
18V Combi Drill

NEW

STOP HIGH LOW

- Lightweight design
- Maximum tightening torque of 43Nm
- Two speed gearbox
- Forward & reverse switch
- 13mm keyless chuck
- 22 stage adjustable torque
- Metal belt hook can be fitted to left or right side

Capacity:		
	Wood	32mm
	Metal	13mm
	Brick	13mm
Chuck capacity		13mm
Charge Time		60 minutes
No-Load Speed		0-400/1500/min
Full Load Impact Rate		0-5600/21000/min
Torque settings		22
Maximum Torque		43Nm
Overall Length		234mm
Weight		1.6kg

DV18DSFL/JB
2 x 2.0Ah Li-Ion batteries
UC18YGSL charger
Driver bit, carrying case

DV18DSFL/JQ
1 x 2.0Ah Li-Ion battery
UC18YGSL charger
Driver bit, carrying case

DS18DSDL
18V Drill/Driver

NEW

4.0Ah Li-ion

- Extremely high torque of 92Nm
- Slimline soft grip
- Fan cooled charger
- Battery level indicator
- Super bright white LED
- Single sleeve metal chuck with ratcheting lock
- Spindle lock
- Variable speed & reverse

Capacity:		
	Wood	65mm
	Metal	13mm
Chuck capacity		13mm
Charge Time For 4Ah Battery		60 minutes
Maximum Torque		92Nm
No-Load Speed		0-400/1800/min
Torque settings		22
Overall Length		228mm
Weight		2.1kg

DS18DSDL/JW
2 x 4.0Ah Li-Ion batteries
UC18YRSL fan cooled charger
Side handle, driver bit, carrying case

DS18DSDL/JV
1 x 4.0Ah Li-Ion battery
UC18YRSL fan cooled charger
Side handle, driver bit, carrying case

DS18DSDL/JB
2 x 2.0Ah Li-Ion batteries
UC18YRSL fan cooled charger
Side handle, driver bit, carrying case

DS18DSDL/L4
Body only
Side handle & driver bit included

92 Nm

DS18DBL
18V Drill/Driver with Brushless Motor

NEW

BRUSH LESS MOTOR

4.0Ah Li-ion

- Compact drill/driver with brushless motor technology
- Highly efficient brushless motor increases working time by 40%
- No carbon brushes to replace
- Longer service life and greatly increased switch life
- Maximum torque of 67Nm
- Electronic switch requires less pulling force for greater control
- 4 stage adjustable rotation speed and a 2 speed gearbox for a wide range of drilling speeds to suit all applications

Capacity:		
	Wood	65mm
	Metal	13mm
Chuck capacity		13mm
Charge Time For 4Ah Battery		60 minutes
No-Load Speed		0-1000/1300/ 1500/1800/min
Torque settings		22
Maximum Torque		67Nm
Overall Length		206mm
Weight		2.0kg

DS18DBL/JW
2 x 4.0Ah Li-Ion batteries
UC18YRSL fan cooled charger
Side handle, driver bit, carrying case

DS18DBL/JV
1 x 4.0Ah Li-Ion battery
UC18YRSL fan cooled charger
Side handle, driver bit, carrying case

DS18DBL/L4
Body only
Side handle & driver bit included

DH18DSL
18V SDS-Plus Hammer Drill

4.0Ah Li-ion

- Slimline soft grip
- Battery charge indicator
- Variable speed & reverse
- Two mode action
- Save Power Mode
- Electric brake
- Integrated LED spotlight
- Fan cooled charger

Capacity:		
	Wood	18mm
	Metal	13mm
	Concrete	16mm
Charge Time For 4Ah Battery		60 minutes
Chuck Type		SDS-Plus
No-Load Speed:	Save/Power	0-750/1500/min
Impact Rate:	Save/Power	0-3100/6200/min
Impact Energy		1.4 Joules
Overall Length		276mm
Weight		2.2kg

DH18DSL/JW
2 x 4.0Ah Li-Ion batteries
UC18YRSL fan cooled charger
Side handle, carrying case

DH18DSL/JV
1 x 4.0Ah Li-Ion battery
UC18YRSL fan cooled charger
Side handle, carrying case

DH18DSL/L4
Body only
Side handle included

C18DSL
18V Circular Saw

4.0Ah Li-ion

- Electric brake for operator safety
- 24 tooth slimline TCT blade (1.6mm kerf) reduces battery drain to maximise cutting time
- Low battery indicator
- Spotlight illuminates cut line
- Blade positioned on left
- No riving knife means easier plunge cutting

Maximum Cut Depth	0°: 57mm
	45° Bevel: 40mm
Charge Time For 4Ah Battery	60 minutes
No-Load Speed	3400/min
Blade Diameter	165mm
Bore Size	30mm
Weight	3.2kg

C18DSL/JW
2 x 4.0Ah Li-Ion batteries
UC18YRSL fan cooled charger
Blade, guide, wrench, carrying case

C18DSL/JV
1 x 4.0Ah Li-Ion battery
UC18YRSL fan cooled charger
Blade, guide, wrench, carrying case

C18DSL/L4
Body only
Blade, guide, wrench included

CJ18DSL
18V Jigsaw

4.0Ah Li-ion

- Base adjustable up to 45° right & left
- Tool free blade release
- LED spotlight illuminates cut line
- Low battery indicator
- 4 mode orbital action
- Soft grip handle

Capacity	Wood/Mild steel	135mm/10mm
Charge Time For 4Ah Battery		60 minutes
No-Load Speed		0-2400/min
Stroke length		26mm
Minimum Cutting Radius		25mm
Weight		2.4kg

CJ18DSL/JW
2 x 4.0Ah Li-Ion batteries
UC18YRSL fan cooled charger
Blade, splinter guard, chip cover, carrying case

CJ18DSL/JV
1 x 4.0Ah Li-Ion battery
UC18YRSL fan cooled charger
Blade, splinter guard, chip cover, carrying case

CJ18DSL/L4
Body only
Blade, splinter guard, chip cover included

CR18DSL
18V Reciprocating Saw

4.0Ah Li-ion

- Variable speed trigger
- Adjustable front shoe
- Tool free blade changing system
- Blade can be fitted facing up or down for extra versatility
- Low battery indicator
- Safety lock-off button
- External brush caps

Capacity:	Wood/Pipe	90mm
	Steel plate	10mm
Charge Time For 4Ah Battery		60 minutes
No-Load Speed		0-2100/min
Stroke length		28mm
Weight		3.3kg

CR18DSL/JW
2 x 4.0Ah Li-Ion batteries
UC18YRSL fan cooled charger
Blade, wrench, carrying case

CR18DSL/JV
1 x 4.0Ah Li-Ion battery
UC18YRSL fan cooled charger
Blade, wrench, carrying case

CR18DSL/L4
Body only
Blade, wrench included

WH18DSAL

18V Impact Driver

NEW 4.0Ah Li-ion

- Slimline soft grip
- Fan cooled charger
- Battery charge indicator
- Save power mode
- Integrated LED light

Capacity:	Screw	4-8mm
	Bolt	M6-M14
	HT Bolt	M6-M12
Drive		6.35mm hex
Charge Time For 4Ah Battery		60 minutes
No-Load Speed		0-2600//min
Impact Rate		0-3200/min
Maximum Torque		145Nm
Overall Length		166mm
Weight		1.7kg

WH18DSAL/JW
2 x 4.0Ah Li-Ion batteries
UC18YRSL fan cooled charger
Carrying case

WH18DSAL/JV
1 x 4.0Ah Li-Ion battery
UC18YRSL fan cooled charger
Carrying case

WH18DSAL/L4
Body only

WH18DBDL

18V Impact Driver with Brushless Motor

NEW 4.0Ah Li-ion

- Ultra compact impact driver with brushless motor technology
- Highly efficient brushless motor increases working time by 30%
- No carbon brushes to replace
- Longer service life and greatly increased switch life
- 4 stage adjustable rotation speed means the WH18DBDL can be used for light or heavy work
- Two impact modes - single for light work or continuous for high torque applications
- White LED spotlight

Capacity:	Screw	4-8mm
	Bolt	M6-M14
	HT Bolt	M6-M12
Drive		6.35mm hex
Charge Time For 4Ah Battery		60 minutes
No-Load Speed		0-500/1200/ 2000/2600//min
Impact Rate		0-3200/min
Maximum Torque		160Nm
Overall Length		157mm
Weight		1.7kg

WH18DBDL/JW
2 x 4.0Ah Li-Ion batteries
UC18YRSL fan cooled charger
Carrying case

WH18DBDL/JV
1 x 4.0Ah Li-Ion battery
UC18YRSL fan cooled charger
Carrying case

WH18DBDL/L4
Body only

WR18DBDL

18V Impact Wrench with Brushless Motor

NEW 4.0Ah Li-ion

- Ultra compact impact wrench with brushless motor technology
- Highly efficient brushless motor increases working time by 30%
- No carbon brushes to replace
- Longer service life and greatly increased switch life
- 4 stage adjustable rotation speed means the WR18DBDL can be used for light or heavy work
- Two impact modes - single for light work or continuous for high torque applications
- White LED spotlight

Capacity:	Bolt	M10-M16
	HT Bolt	M8-M14
Drive		12.7mm square
Charge Time For 4Ah Battery		60 minutes
No-Load Speed		0-500/1200/ 2000/2600//min
Impact Rate		0-3200/min
Maximum Torque		250Nm
Overall Length		162mm
Weight		1.7kg

WR18DBDL/JW
2 x 4.0Ah Li-Ion batteries
UC18YRSL fan cooled charger
Carrying case

WR18DBDL/JV
1 x 4.0Ah Li-Ion battery
UC18YRSL fan cooled charger
Carrying case

WR18DBDL/L4
Body only

WR18DSHL
18V Impact Wrench

NEW

4.0Ah Li-ion

HITACHI
480 Nm
HITACHI
4.0Ah Li-ion

- Powerful tightening torque of 480Nm
- Forward-reverse rocker switch
- Slimline soft grip handle
- White LED spotlight illuminates work-piece
- Battery level indicator
- " square drive
- External brush caps

Capacity:	Bolt	M12-M22
	HT Bolt	M12-M16
Drive		12.7mm square
Charge Time For 4Ah Battery		60 minutes
No-Load Speed		0-1500//min
Impact Rate		0-2000/min
Maximum Torque		480Nm
Overall Length		264mm
Weight		3.4kg

WR18DSHL/JW
2 x 4.0Ah Li-Ion batteries
UC18YRSL fan cooled charger
Carrying case

WR18DSHL/JV
1 x 4.0Ah Li-Ion battery
UC18YRSL fan cooled charger
Carrying case

WR18DSHL/L4
Body only

G18DSL
18V Angle Grinder

STOP | HIGH LOW | ISP | 4.0Ah Li-ion

- High torque design
- Low gear cover height for easier access to confined areas
- Slimline soft grip
- Low battery indicator
- Side mounted switch
- Replaceable carbon brushes

Wheel diameter	115mm
Charge Time For 4Ah Battery	60 minutes
No-Load Speed	9100/min
Overall Length	296mm
Weight	1.8kg

G18DSL/JW
2 x 4.0Ah Li-Ion batteries
UC18YRSL fan cooled charger
Side handle, abrasive wheel, carrying case

G18DSL/JV
1 x 4.0Ah Li-Ion battery
UC18YRSL fan cooled charger
Side handle, abrasive wheel, carrying case

G18DSL/L4
Body only

R18DSL
18V Wet/Dry Vacuum

Li-iON BATTERY

- High efficency collection of solid & liquid waste
- Accepts 18V slide-in Li-Ion batteries
- High capacity translucent dust case
- Includes 3 nozzles for extra vesatility
- Battery not included

Dust Capacity	670ml
Continuous Operation	Up to 29 minutes with BSL1830
Weight (without battery)	0.84kg

Standard Accessories: Crevice nozzle, brush nozzle, squeegee nozzle

UR18DSL
18V Site Radio

- High quality AM/FM stereo radio
- Can be powered by any Hitachi 14.4V/18V slide-on or clip-on battery (not included)
- Includes mains power adapter
- Digital tuner with LCD display
- 5 preset stations
- High sensitivity large-scale antenna gives a high frequency
- Maximum volume of 83.1db with an 18V battery at 1 metre
- 2 x 3 inch speakers and bass reflex
- AUX socket can be used with MP3 player
- USB socket to charge a mobile phone (not compatible with Apple products)
- Rubber frame protection

COMPATIBLE WITH
CLIP-ON BATTERIES | SLIDE-ON BATTERIES
NICAD, NI-MH, LI-ION

Usable Battery	14.4V/18V NiCad/NiMH/Li-Ion Clip-on/Slide-on
Frequency	522-1620kHz (AM) 87.5-108MHz (FM)
Dimensions (H x W x L)	281 x 184 x 231mm
Weight (Without Battery)	3.3kg

UB18DAL
Torch

Li-iON BATTERY | SLIDE-ON BATTERIES

- 110° adjustable head
- Low battery indicator
- Shoulder strap
- Accepts 18V slide on batteries
- Spare bulb in head
- Battery not included

Battery (not included):	BSL1830
Continuous Illumination:	Up to 4.5 hours with 3.0Ah battery
Overall Height:	274mm
Weight:	0.35kg

UB18DSL
Lantern

Li-iON BATTERY | SLIDE-ON BATTERIES

- LED & fluorescent lamps
- Rotary handle
- Automatically switches to LED light on low power
- Battery not included

Battery (not included):		BSL1830
Continuous Illumination using 3.0Ah Battery:	Fluorescent	Up to 5 hours
	LED Light	Up to 150 hours
Overall Height:		305mm
Weight:		0.5kg

KTL418S/JW
4 Piece 18V 4.0Ah Li-Ion Kit

4.0Ah Li-ion

DV18DSDL Combi Drill

C18DSL Circular Saw

WH18DSAL Impact Driver

UB18DAL Torch

UC18YSRL Charger

3 x BSL1840 batteries

705510 Tool Bag

KTL518S/JW
5 Piece 18V 4.0Ah Li-Ion Kit

4.0Ah Li-ion

WH18DSL Impact Driver

CJ18DSL Jigsaw

C18DSL Circular Saw

DV18DSDL Combi Drill

UB18DAL Torch

UC18YRSL Charger

3 x BSL1840 batteries

705510 Tool Bag

KTL618S/JW
6 Piece 18V 4.0Ah Li-Ion Kit

4.0Ah Li-ion

G18DSL Angle Grinder

CR18DSL Reciprocating Saw

C18DSL Circular Saw

WH18DSAL Impact Driver

DV18DSDL Combi Drill

UB18DAL Torch

UC18YRSL Charger

3 x BSL1840 batteries

705510 Tool Bag

KTL618SJ/JW
6 Piece 18V 4.0Ah Li-Ion Kit

4.0Ah Li-ion

G18DSL Angle Grinder

CJ18DSL Jigsaw

C18DSL Circular Saw

WH18DSAL Impact Driver

DV18DSDL Combi Drill

UB18DAL Torch

UC18YRSL Charger

3 x BSL1840 batteries

705510 Tool Bag

KTL718S/JW
7 Piece 18V 4.0Ah Li-Ion Kit

4.0Ah Li-ion

G18DSL Angle Grinder

CJ18DSL Jigsaw

C18DSL Circular Saw

WH18DSAL Impact Driver

DV18DSDL Combi Drill

DH18DSL Hammer Drill

UC18YRSL Charger

3 x BSL1840 batteries

UB18DAL Torch

705510 Tool Bag

KTL918S/JW
9 Piece 18V 4.0Ah Li-Ion Kit

4.0Ah Li-ion

G18DSL Angle Grinder

CJ18DSL Jigsaw

C18DSL Circular Saw

WH18DSAL Impact Driver

DV18DSDL Combi Drill

DH18DSL Hammer Drill

R18DSL Wet/Dry Vacuum

CR18DSL Reciprocating Saw

UB18DAL Torch

UC18YRSL Charger

3 x BSL1840 batteries

705510 Tool Bag

10.8V Cordless Tools

DB3DL2
3.6V Screwdriver

Li-iON BATTERY

LED SPOTLIGHT 1.5Ah 30 min

NEW

- Two 1.5Ah Li-Ion batteries
- 21 stage torque setting
- White LED spotlight
- 6.35mm (") hex bit holder
- Spindle lock
- Lock off switch

Capacity:	Metal	5mm
	Machine Screw	5mm
	Wood Screw	3.8 x 38mm
Drive		6.35mm hex
Battery		2 x EBM315
Charge Time		30 minutes
No-Load Speed		200, 600/min
Maximum Torque		5Nm
Overall Length		268mm
Weight		0.45kg

Standard Accessories: UC3SFL charger, 2 x 1.5Ah batteries, driver bit, carrying case.

DB10DL
10.8V Screwdriver

Li-iON BATTERY

LED SPOTLIGHT 1.5Ah 40 min

- Automatic trigger operated LED spotlight
- Variable speed motor
- Low battery indicator
- 21 stage torque setting
- 6.35mm quick lock hex bit holder
- Spindle lock for accurate tightening of screws
- 40 minute charger

Capacity:	Wood	18mm
	Machine Screw	6mm
	Wood Screw	6mm
Drive		6.35mm hex
Battery		2 x BCL1015
Charge Time		40 minutes
No-Load Speed		0-400/min
Maximum Torque		10Nm
Overall Length		147mm
Weight		0.8kg

Standard Accessories: UC10SFL charger, 2 x 1.5Ah batteries, driver bit, carrying case.

DS10DFL
10.8V Drill/Driver

Li-iON BATTERY

LED SPOTLIGHT 1.5Ah 40 min

- Automatic trigger operated LED spotlight
- 10mm keyless chuck
- Variable speed motor
- Two speed gearbox
- 21 stage torque setting
- High torque of 22Nm grip handle
- 40 minute charger

Capacity:	Wood/Metal	21/10mm
	Machine Screw	6mm
	Wood Screw	6mm
Chuck Capacity		10mm
Battery		2 x BCL1015
Charge Time		40 minutes
No-Load Speed		0-300/1300min
Maximum Torque		22Nm
Overall Length		188mm
Weight		1.0kg

Standard Accessories: UC10SFL charger, 2 x 1.5Ah batteries, driver bit, carrying case.

WH10DFL/JL
10.8V Impact Driver

Li-iON BATTERY

STOP LED SPOTLIGHT 1.5Ah 40 min

- Automatic trigger operated LED spotlight
- Lightweight, compact design
- Powerful motor with 95Nm torque
- 6.35mm quick lock hex bit holder
- 40 minute charger

Capacity: Bolt	M5-M12
Drive	6.35mm hex
Battery	2 x BCL1015
Charge Time	40 minutes
No-Load Speed	0-2500/min
Impact rate	0-3000/min
Maximum Torque	95Nm
Overall Length	151mm
Weight	1.0kg

Standard Accessories: UC10SFL charger, 2 x 1.5Ah batteries, driver bit, carrying case.

UR10DL
10.8V Mini Radio

Li-iON BATTERY CLIP-ON BATTERIES LED SPOTLIGHT

- Compact design
- Powered by a BCL1015 battery (not included)
- Includes LED spotlight
- 8 ohm speaker
- AM & FM bands
- Compatible with all Hitachi 10.8V/12V Peak cordless tools

Usable Battery		BCL1015
Frequency		522-1620kHz (AM) 87.5-108MHz (FM)
Dimensions (H x W x L)		
	Without Battery	146.5 x 95 x 48.5mm
	With Battery	172 x 95 x 48.5mm
Weight		
	Without Battery	0.2kg
	With Battery	0.4kg

BCL-10UA
10.8V USB Adapter

NEW

- Handy adapter converts a 10.8V battery to USB output
- Powered by a BCL1015 Li-Ion battery (not supplied)
- 5V 0.5A output suitable for charging a mobile phone
- USB A type connector fits many models of mobile phone
- Indicator light shows when enough power is available

Usable Battery	BCL1015
Output Terminal	USB
Dimensions	51 x 48 x 27mm
Weight	40g

Battery/USB lead not included
Not compatible with Apple products

WH10DL
10.8V Impact Driver

Li-iON BATTERY

1.5Ah 40 min

- Automatic trigger operated LED spotlight
- Low battery indicator
- 6.35mm quick lock hex bit holder
- External brush caps
- 40 minute charger

Capacity:	Small Bolt	M4-M8
	Bolt	M5-M12
	HT Bolt	M5-M10
Drive		6.35mm hex
Battery		2 x BCL1015
Charge Time		40 minutes
No-Load Speed		0-2300/min
Maximum Torque		105Nm
Overall Length		139mm
Weight		0.9kg

WH10DL/JL
Full kit
UC10SFL charger, 2 x 1.5Ah batteries
Driver bit, carrying case

WH10DL/L4
Body only
Driver bit included

WH10DCL
10.8V Angle Impact driver

Li-iON BATTERY

1.5Ah 40 min

- Automatic trigger operated LED spotlight
- Low head height of 53mm
- Low battery indicator
- 6.35mm quick lock hex bit holder
- Forward/reverse
- Soft grip handle
- 40 minute charger

Capacity:	Wood screw	4-8mm
	Bolt/HT Bolt	M4-M10/M4-M8
Drive		6.35mm hex
Battery		1 x BCL1015
Charge Time		40 minutes
No-Load Speed		0-2100/min
Impact Rate		0-3000/min
Maximum Torque		30Nm
Overall Length		280mm
Weight		1.0kg

WH10DCL/JL
Full kit
UC10SFL charger, 1 x 1.5Ah battery
Driver bit, carrying case

WH10DCL/L4
Body only
Driver bit included

CR10DL
10.8V Reciprocating Saw

Li-iON BATTERY

1.5Ah 40 min

- Compact, slimline design
- Automatic trigger operated LED spotlight
- Low battery indicator
- Tool free blade changing system
- Adjustable front shoe
- 40 minute charger

Capacity:	Pipe	45mm
	Wood	50mm
	Metal	4mm
Battery		1 x BCL1015
Charge Time		40 minutes
No-Load Speed		0-2700/min
Stroke Length		13mm
Overall Length		349mm
Weight		1.2kg

CR10DL/JL
Full kit
UC10SFL charger, 1 x 1.5Ah battery
Blade, wrench, carrying case

CR10DL/L4
Body only
Driver bit included

10.8V Cordless Kits

KC10DFL
2 Piece 10.8V Li-Ion Kit

- Lightweight cordless kit with a nylon toolbag
- DS10DFL lightweight high spec drill/driver
- WH10DFL lightweight high spec impact driver
- 2 x 1.5Ah Li-Ion batteries
- UC10SFL 40 minute charger
- Optimally balanced design
- DS10DFL has a maximum torque of 22Nm
- WH10DFL has a maximum torque of 95Nm
- Slim soft grip handle shape for comfortable use
- Automatic trigger operated LED light
- 40 minute charge time

KTL310DD/ID
3 Piece 10.8V Li-Ion Kit

DB10DL Drill/Driver

UB10DL Torch

WH10DL Impact Driver

UC10SFL Charger

2 x EBM1015 batteries

705511 Tool Bag

KTL310DD/AID
3 Piece 10.8V Li-Ion Kit

DB10DL Drill/Driver

UB10DL Torch

WH10DCL Angle Impact Driver

UC10SFL Charger

2 x EBM1015 batteries

705511 Tool Bag

KTL410DD
4 Piece 10.8V Li-Ion Kit

DB10DL Drill/Driver

UB10DL Torch

WH10DCL Angle Impact Driver

CR10DL Reciprocating Saw

UC10SFL Charger

2 x EBM1015 batteries

705511 Tool Bag

KTL410ID
4 Piece 10.8V Li-Ion Kit

WH10DL Impact Driver

UB10DL Torch

WH10DCL Angle Impact Driver

CR10DL Reciprocating Saw

UC10SFL Charger

2 x EBM1015 batteries

705511 Tool Bag

KTL510
5 Piece 10.8V Li-Ion Kit

DB10DL Drill/Driver

WH10DL Impact Driver

UB10DL Torch

WH10DCL Angle Impact Driver

CR10DL Reciprocating Saw

UC10SFL Charger

3 x EBM1015 batteries

705511 Tool Bag

HITACHI
HITACHI

DH14DL/L4
14.4V Hammer Drill Body

- Fastest drilling speed in its class
- Variable speed & reverse
- Electric brake
- Belt hook with LED spotlight
- Save Power Mode
- Fan cooled charger
- Body only model without batteries, charger and case

Capacity:	Wood/Metal	18mm/13mm
	Concrete	16mm
Chuck Type		SDS-Plus
Battery		None
No-Load Speed:	Power	0-750/min
	Save	0-1500/min
Full Load Impact Rate:		
	Power	0-3100/min
	Save	0-6200/min
Impact Energy		1.4 Joules
Overall Length		251mm
Weight		1.6kg

Standard Accessories: Side handle, depth stop

CJ14DL/L4
14.4V Jigsaw Body

- Base adjustable up to 45° right & left
- Tool free blade release
- LED spotlight illuminates cut line
- Dust blower ensures cut line is clear
- 4 mode orbital action
- Soft grip handle
- Body only model without batteries, charger and case

Capacity	Wood/Steel:	135mm/10mm
Battery		None
No-Load Speed		0-2400/min
Stroke length		26mm
Minimum cutting radius		25mm
Weight		1.8kg

Standard Accessories: Blade, splinter guard, chip cover

G14DL/L4
14.4V Angle Grinder Body

- High torque design
- Low gear cover height for easier access to confined areas
- Slimline grip
- Side mounted switch
- Replaceable carbon brushes
- Body only model without batteries, charger and case

Wheel diameter	115mm
Battery	None
No-Load Speed	9300/min
Overall Length	325mm
Weight	1.3kg

Standard Accessories: Side handle, abrasive wheel, wrench

WH14DCAL
14.4V Angle Impact Driver

WH14DCAL/JL
2 x 3.0Ah Li-Ion batteries

UC18YRL fan cooled charger
Carrying case

WH14DCAL/L4
Body only

- Maximum torque of 50Nm
- Short head height of only 53mm - ideal for working in confined spaces
- Long paddle lever switch
- Reverse facility
- Lock-off button for extra safety
- Fan Cooled Charger

Capacity:	Screw	4-8mm
	Bolt	4-10mm
	HT Bolt	4-8mm
Drive		6.35mm hex
Charge Time		45 minutes
No-Load Speed		0-2100/min
Impact Rate		0-3200/min
Maximum Torque		50Nm
Overall Length		392mm
Weight		1.6kg

CL14DSL
14.4V Stud Cutter

- High speed cutting of studs - up to 660 per charge (M10)
- Cuts quickly and quietly with no sparks or chips
- Minimal damage to the workpiece
- Multi-edged blades prolong operating life
- Convenient stud mounting hole enables rapid cutting of uniform lengths

Max no of cuts per charge		
(Mild steel studs):	M10:	660
	M8:	1020
	M6:	1520
	3/8" Whitworth:	740
Battery		2 x BSL1430
Charge Time		45 minutes
No-Load Stroke		30/min
Dimensions (L x H)		277 x 185mm
Weight		2.9kg

Standard Accessories: UC18YRSL charger, 2 x 3.0Ah Li-Ion batteries, wrench, M10 cutters, M10 deburring tool, carrying case

18V Body Only Cordless Tools

DV18DL2/L4
18V Combi Drill body

LED SPOTLIGHT · HIGH LOW · STOP

NEW

- Maximum torque of 92Nm
- Accepts NiCad, NiMH and Li-Ion clip-on batteries
- White LED spotlight
- 13mm Jacobs chuck with ratcheting lock
- 22 stage torque setting
- Adjustable belt hook with integral bit holder
- Spindle lock
- Body only model without batteries, charger and case

Capacity:	Wood/Metal	65mm/13mm
	Brick	16mm
Chuck capacity		13mm
Battery		None
No-Load Speed:	Power	0-200/900/min
	Save	0-400/1800/min
Full Load Impact Rate:		027000/min
Maximum Torque		92Nm
Overall Length		242mm
Weight		1.6kg

Standard Accessories: Driver bit

WH18DL/L4
18V Impact Driver body

LED SPOTLIGHT · STOP

- Save Power Mode
- High maximum torque of 150Nm
- Variable speed
- Reverse facility
- Belt Hook with LED Light
- Body only model without batteries, charger and case

Capacity:	Screw	4-10mm
	Bolt	M6-M14
	HT Bolt	M6-M12
Drive		6.35mm hex
Battery		None
No-Load Speed		0-2000/0-2600/min
Impact Rate		0-2400/0-3200/min
Maximum Torque		150Nm
Overall Length		162mm
Weight		1.0kg

WR18DL/L4
18V Impact Wrench

Li-ion BATTERY

STOP · LED SPOTLIGHT

- Save Power Mode
- High maximum torque of 220Nm
- Variable speed
- Reverse facility
- Fan Cooled Charger
- Belt Hook with LED Light
- Body only model without batteries, charger and case

Capacity:	Bolt	M10-M16
	HT Bolt	M8-M14
Drive		12.7mm square
Battery		None
No-Load Speed		0-2000/0-2600/min
Impact Rate		0-2400/0-3200/min
Maximum Torque		220Nm
Overall Length		167mm
Weight		1.0kg

DH18DL/L4
18V Hammer Drill

STOP · LED SPOTLIGHT

- Fastest drilling speed in its class
- Variable speed & reverse
- Electric brake
- Belt hook with LED spotlight
- Save Power Mode
- Body only model without batteries, charger and case

Capacity:	Wood/Metal	18mm/13mm
	Concrete	16mm
Chuck Type		SDS-Plus
Battery		None
No-Load Speed:	Power	0-750/min
	Save	0-1500/min
Full Load Impact Rate:		
	Power	0-3100/min
	Save	0-6200/min
Impact Energy		1.4 Joules
Overall Length		251mm
Weight		1.7kg

Standard Accessories: Side handle, depth stop

C18DL/L4
18V Circular Saw Body

ISP · LED SPOTLIGHT

- Electric brake for operator safety
- 24 tooth slimline TCT blade (1.6mm kerf) reduces battery drain to maximise cutting time
- Spotlight illuminates cut line
- No riving knife means easier plunge cutting
- Body only model without batteries, charger and case

Maximum Cut Depth	0°: 57mm 45°
Bevel:	40mm
Battery	None
No-Load Speed	3400/min
Blade Diameter	165mm
Bore Size	30mm
Overall Length	351mm
Weight	2.6kg

Standard Accessories: Blade, guide, wrench

CR18DL/L4
18V Reciprocating Saw Body

- Variable speed trigger
- Adjustable front shoe
- Tool free blade changing system
- Blade can be fitted facing up or down for extra versatility
- Safety lock-off button
- External brush caps
- Body only model without batteries, charger and case

Capacity	Wood	90mm
	Steel Plate	10mm
	Pipe	90mm
Battery		None
No-Load Speed		0-2100/min
Stroke length		28mm
Weight		2.8kg

Standard Accessories: Blade, wrench

CJ18DL/L4
18V Jigsaw Body

LED SPOTLIGHT

- Base adjustable up to 45° right & left
- Tool free blade release
- Dust blower illuminates cut line
- LED spotlight illuminates cut line
- 4 mode orbital action
- Soft grip handle
- Body only model without batteries, charger and case

Capacity	Wood/Steel:	135mm/10mm
Battery		None
No-Load Speed		0-2400/min
Stroke length		26mm
Minimum cutting radius		25mm
Weight		1.7kg

Standard Accessories: Blade, splinter guard, chip cover.

G18DL/L4
18V Angle Grinder Body

CLIP-ON BATTERIES

ISP

- High torque design
- Low gear cover height for easier access to confined areas
- Slimline grip
- Side mounted switch
- Replaceable carbon brushes
- Body only model without batteries, charger and case

Wheel diameter	115mm
Battery	None
No-Load Speed	9100/min
Overall Length	325mm
Weight	1.8kg

Standard Accessories: Side handle, abrasive wheel, wrench

DH24DVA/JC
24V Hammer Drill

NiCad Battery

STOP

2.0Ah
50 min

- Save power mode
- Push fit bit reception
- Electronic feedback speed control
  Electric brake
- Variable speed & reverse
- Safety clutch
- Drill bit not included

Capacity:	
Concrete/Mild Steel/Soft Wood	24/13/30mm
Chuck Type	SDS-Plus
Battery	2 x EB2420
Charge Time	50 minutes
No-Load Speed	0-1050/0-520/min
Full Load Impact Rate	0-4500/0-2200/min
Impact Energy	2.8J
Length	322mm
Weight	4.1kg

Standard Accessories: UC24YFB charger, 2 x 2.0Ah batteries, side handle, depth stop, carrying case

DH24DVC
24V Hammer Drill

Ni-MH Battery

STOP

2.0Ah
60 min

- Three mode action in roto-stop
- Variable speed & reverse
- Safety clutch
- Multi-angle chisel setting
- Replaceable carbon brushes

Capacity:	
Concrete/Mild Steel/Soft Wood	20/13/27mm
Chuck Type	SDS-Plus
Battery	2 x BSH2420
Charge Time	60 minutes
No-Load Speed	0-1250/min
Full Load Impact Rate	0-5600/min
Impact Energy	1.7J
Length	305mm
Weight	4.1kg

Standard Accessories: UC24SGH charger, 2 x 2.0Ah batteries, side handle, depth stop, carrying case

DH25DAL
25.2V Hammer Drill

Li-ion Battery

STOP

3.0Ah
60 min

- Fastest drilling speed in its class
- Three mode action includes hammer only for light chiselling
- Variable speed & reverse
- Electric brake
- Push fit bit installation
- 'Save power' mode
- Fan cooled charger
- Drill bit not included

Capacity	Concrete/Metal/Wood	26/13/30mm
Chuck Type		SDS-Plus
Battery		2 x BSL2530
Charge Time		60 minutes
No-Load Speeds		0-550/1100/min
Impact Rates		0-2250/4500
Impact Energy		2.8 Joules
Overall Length		322mm
Weight		3.6kg

Standard Accessories: 2 batteries, UC36YRL charger, side handle, depth stop, carrying case

DH36DAL
36V Hammer Drill

Li-ion Battery

STOP

2.6Ah
80 min

- Fastest drilling speed in its class
- Three mode action includes hammer only for light chiselling
- Variable speed & reverse
- Electric brake
- Push fit bit installation
- 'Save power' mode
- Fan cooled charger
- Drill bit not included

Capacity	Concrete/Metal/Wood	26/13/30mm
Chuck Type		SDS-Plus
Battery		2 x BSL3626
Charge Time		80 minutes
No-Load Speeds		0-550/1100/min
Impact Rates		0-2250/4500
Impact Energy		2.8 Joules
Overall Length		322mm
Weight		4.0kg

Standard Accessories: 2 batteries, UC36YRL charger, side handle, depth stop, carrying case

R18DL
18V Wet/Dry Vacuum

- High efficency collection of solid & liquid waste
- Accepts Li-Ion, NiMH or NiCad plug-in batteries
- High capacity translucent dust case
- Includes 3 nozzles for extra vesatility
- Battery not included

Dust Capacity	670ml
Continuous Operation	Up to 29 minutes with EBM1830
Weight (without battery)	0.84kg

Standard Accessories: Crevice nozzle, brush nozzle, squeegee nozzle

WH14DAF2/JR
14.4V Impact Driver

NiCad Battery **2.0Ah 50 min**

- LED spotlight
- Variable speed
- Fan cooled motor
- Reverse
- Electric brake
- Adjustable belt hook

Capacity:	Screw	4-8mm
	Bolt	M5-M12
	HT Bolt	M5-M10
Drive		6.35mm hex
Battery		2 x EB14B
Charge Time		50 minutes
No-Load Speed		0-2500/min
Impact Rate		0-2900/min
Maximum Torque		120Nm
Overall Length		176mm
Weight		1.7kg

Standard Accessories: UC18YG charger, 2 x 2.0Ah batteries, carrying case

DS12DVF3
12V Drill/Screwdriver

NiCad Battery **1.4Ah 30 min**

- 3 x NiCad batteries
- Keyless chuck
- Two speed motor
- Variable speed & reverse
- Electric brake
- Electronic feedback speed control

Capacity:	Mild Steel/Soft Wood:	12/25mm
Chuck Capacity		10mm
Battery		3 x EB1214S
Charge Time		30 minutes
No-Load Speed		0-350/1050 /min
Torque		22 stage
Maximum Torque		26Nm
Length		198mm
Weight		1.5kg

Standard Accessories: UC18YG charger, 3 x 1.4Ah batteries, driver bit, 7pce bit set, carrying case

DN12DY
12V Angle Drill

NiCad Battery **2.0Ah 50 min**

- Keyless chuck
- 95mm head height
- Variable speed & reverse
- Electric brake
- Electronic feedback power control

Capacity	Mild Steel/Soft Wood	10/18mm
Chuck Capacity		10mm
Battery		2 x EB1220BL
Charge Time		50 minutes
No-Load Speed		0-800/min
Maximum Torque		9Nm
Head Height		95mm
Length		305mm
Weight		1.4kg

Standard Accessories: UC14YFA charger, 2 x 2.0Ah batteries, driver bit, carrying case

DS14DVF3/JD
14.4V Drill/Screwdriver

NiCad Battery **1.4Ah 30 min**

- 3 x NiCad batteries
- Keyless chuck
- Two speed motor
- Variable speed & reverse
- Electric brake
- Electronic feedback speed control

Capacity:	Mild Steel/Soft Wood:	12/30mm
Chuck Capacity		10mm
Battery		3 x EB1414S
Charge Time		30 minutes
No-Load Speed		0-400/1200 /min
Torque		22 stage
Maximum Torque		34Nm
Length		210mm
Weight		1.8kg

Standard Accessories: UC18YG charger, 3 x 1.4Ah batteries, driver bit, 7pce bit set, carrying case

DS14DVF3/JR
14.4V Drill/Screwdriver

NiCad Battery **1.4Ah 30 min**

- 2 x NiCad batteries
- Keyless chuck
- Two speed motor
- Variable speed & reverse
- Electric brake
- Electronic feedback speed control

Capacity:	Mild Steel/Soft Wood:	12/30mm
Chuck Capacity		10mm
Battery		2 x EB1414S
Charge Time		30 minutes
No-Load Speed		0-400/1200 /min
Torque		22 stage
Maximum Torque		34Nm
Length		210mm
Weight		1.8kg

Standard Accessories: UC18YG charger, 2 x 1.4Ah batteries, driver bit, carrying case

Li-Ion Batteries						Chargers						
Voltage	Image	Model Number	Part Number	Style	Capacity	UC3SFL	UC10SFL	UC18YKL	UC18YRL	UC18YGSL	UC18YRSL	UC36YRL
3.6V		EBM315	326299	Clip-on	1.5Ah	30 min						
10.8V		BCL1015	331067	Clip-on	1.5Ah		40 min					
14.4V		BCL1415	327729	Clip-on	1.5Ah			60 min	20 min			
		BCL1430	326824	Clip-on	3.0Ah				45 min			
		BSL1430	329083	Slide-on	3.0Ah					90 min	45 min	
18V		BCL1815	327731	Clip-on	1.5Ah			60 min	20 min			
		BSL1820	334420	Slide-on	2.0Ah					60 min	30 min	
		BSL1830	330068	Slide-on	3.0Ah					90 min	45 min	
		EBM1830	326240	Clip-on	3.0Ah			120 min	45 min			
		BSL1840	334421	Slide-on	4.0Ah					120 min	60 min	
25.2V		BSL2530	328033	Slide-on	3.0Ah							60 min
36V		BSL3626	328036	Slide-on	2.6Ah							80 min

NiMH & NiCad Batteries

NiMH Batteries					Chargers			
Voltage	Model Number	Part Number	Style	Capacity	UC14YFA	UC18YKL	UC18YRL	UC24YFA
9.6V	EB926H	323225	Clip-on	2.6Ah	65 min	100 min	40 min	65 min
	EB930H	318368	Clip-on	3.0Ah	70 min	120 min	45 min	70 min
12V	EB1226HL	323226	Clip-on	2.6Ah	60 min	100 min	40 min	60 min
	EB1230H	318841	Clip-on	3.0Ah	70 min	120 min	45 min	70 min
14.4V	EB1426H	322883	Clip-on	2.6Ah	70 min	100 min	40 min	60 min
18V	EB1826HL	322878	Clip-on	2.6Ah		100 min	40 min	60 min
	EB1830H	319765	Clip-on	3.0Ah		120 min	45 min	70 min
24V	EB2430H	319105	Clip-on	3.0Ah				70 min

Super-NiMH Batteries					Chargers				
Voltage	Model Number	Part Number	Style	Capacity	UC14YFA	UC18YKL	UC18YRL	UC24YFA	UC24YFB
14.4V	EB1433X	326054	Clip-on	3.3Ah	75 min	120 min	50 min	75 min	
18V	EB1833X	326055	Clip-on	3.3Ah		120 min	50 min	75 min	
24V	EB2433X	326056	Slide-on	3.3Ah					75 min

NiCad Batteries					Chargers					
Voltage	Model Number	Part Number	Style	Capacity	UC7SD	UC18YG	UC18YKL	UC18YRL	UC24YFA	UC24YFB
7.2V	BCC715	333431	Clip-on	1.5Ah	60 min	40 min	60 min	20 min	40 min	
9.6V	EB914S	324079	Clip-on	1.4Ah	30 min	30 min	50 min	20 min	30 min	
	EB9B	310377	Clip-on	2.0Ah		50 min	80 min	30 min	50 min	
	EB9M	310379	Clip-on	2.0Ah		50 min	80 min	30 min	50 min	
12V	BCC1215	333156	Clip-on	1.5Ah		40 min	60 min	25 min	45 min	
	EB1220BL	320387	Clip-on	2.0Ah		50 min	80 min	30 min	50 min	
	EB12M	310380	Clip-on	2.0Ah		50 min	80 min	30 min	50 min	
	EB12B	310378	Clip-on	2.0Ah		50 min	80 min	30 min	50 min	
14.4V	BCC1415	333159	Clip-on	1.5Ah		40 min	60 min	25 min	45 min	
	EB14B	315130	Clip-on	2.0Ah		50 min	80 min	30 min	50 min	
18V	BCC1815	333161	Clip-on	1.5Ah		40 min	60 min	min	45 min	
	EB1820	319764	Clip-on	2.0Ah		50 min	80 min	30 min	50 min	
24V	EB2420	326555	Slide-on	2.0Ah						50 min
	EB24B	316959	Clip-on	2.0Ah					50 min	

D6SH
Rotary Drill

- High speed motor
- Compact design
- Light weight
- Includes belt hook

Capacity :	Steel	6.5mm
	Wood	9mm
Chuck Capacity		6.5mm
Power Input		240W
No-Load Speed		4500/min
Overall Length		206mm
Weight		0.9kg

Standard Accessories: Chuck key, depth stop, belt clip

D10VC2
Rotary Drill

- Keyless chuck
- Variable speed
- Reverse
- Soft grip handle

Capacity:	Steel	10mm
	Wood	25mm
Chuck Capacity		10mm
Power Input		460W
No-Load Speed		0-2300/min
Overall Length		238mm
Weight		1.3kg

Standard Accessories: Carrying case

D10VF
Rotary Drill

- Keyless chuck
- Variable speed
- Reverse
- Soft grip handle

Capacity:	Steel	10mm
	Wood	25mm
Chuck Capacity		10mm
Power Input		710W
No-Load Speed		0-3000/min
Overall Length		265mm
Weight		1.8kg

Standard Accessories: Carrying case

D13VF
Rotary Drill

- Keyless chuck
- Variable speed
- Reverse
- Soft grip handle

Capacity:	Steel	13mm
	Wood	40mm
Chuck Capacity		13mm
Power Input		710W
No-Load Speed		0-850/min
Overall Length		265mm
Weight		2.1kg

Standard Accessories: Side handle, carrying case

D13
Rotary Drill

- High torque output for specific applications
- Reverse facility
- All metal gear housing for high durability
- Top handle plus rear D handle for greater control
- External brush caps

Capacity:	Steel	13mm
	Wood	40mm
Chuck Capacity		13mm
Power Input		720W
No-Load Speed		550/min
Overall Length		378mm
Weight		3.0kg

Standard Accessories: Chuck key, side handle, back handle

D10YB
Angle Drill

- Ideal for restricted spaces
- Slimline body design
- Low head height of 84mm
- Variable speed
- Reverse

Capacity:	steel	10mm
	wood	22mm
Chuck capacity		10mm
Power input		500W
No-load speed		500-2300/min
Head height		84mm
Grip circumference		184mm
Overall length		290mm
Weight		1.5kg

Standard Accessories: Side handle, chuck key

Impact Drills

FDV16VB2
Impact Drill

- Variable speed
- Two mode action
- Lightweight & compact
- Reverse
- Keyless chuck
- Soft grip handle

Capacity :	Brick	16mm
	Steel	13mm
	Wood	25mm
Chuck Capacity		13mm
Power Input		550W
No-Load Speed		0-2900/min
Full-Load Impact Rate		27360/min
Overall Length		289mm
Weight		1.6kg

Standard Accessories: Side handle, depth stop, carrying case

DV16V
Impact Drill

- Variable speed
- Two mode action
- Reverse
- Keyless chuck
- Soft grip handle

Capacity:	Brick	16mm
	steel	13mm
	wood	25mm
Chuck capacity		13mm
Power input		590W
No-load speed		0-2900/min
Full Load Impact Rate		34500/min
Overall length		269mm
Weight		1.5kg

Standard Accessories: Side handle, depth stop, carrying case

DV18V
Impact Drill

- Variable speed
- Two mode action
- Reverse
- Keyless chuck
- Soft grip handle

Capacity:	Brick	18mm
	Steel	13mm
	Wood	40mm
Chuck Capacity		13mm
Power Input		690W
No-load speed		0-1000/13000min
Full Load Impact Rate		0-13000/39000/min
Overall length		333mm
Weight		2.0kg

Standard Accessories: Side handle, depth stop, carrying case

DV20VB2
Impact Drill

- Variable speed
- Two speed gearbox
- Two mode action
- Reverse
- Keyless chuck
- Soft grip handle

Capacity:	Brick	20mm
	Steel	13mm
	Wood	40mm
Chuck capacity		13mm
Power input		790W
No-load speed		0-1000/3000/min
Full Load Impact Rate		0-13000/39000/min
Overall length		333mm
Weight		2.2kg

Standard Accessories: Side handle, depth stop, carrying case

HITACHI
DV 20VB2

W6V4
Drywall Screwdriver

- Ideal for drywall screws
- Adjustable depth setting
- Lock-on button
- Ergonomic body design with soft grip handle
- Improved handle geometry for greater operator comfort
- Aluminium gear casing
- Detachable sub stopper
- Extra long 7.5m power cord

Bit Shank	6.35mm
Capacity: Drywall Screw	6mm
Power Input	620W
No-Load Speed	0-4500/min
Overall Length	312mm
Weight	1.4kg

Standard Accessories: No 2 driver bit, sub stopper

W6VM
Drywall Screwdriver

- Ideal for drywall screws
- Adjustable depth setting
- Lock-on button
- Ergonomic body design with soft grip handle
- Improved handle geometry for greater operator comfort
- Aluminium gear casing
- Detachable sub stopper
- Extra long 7.5m power cord

Bit Shank	6.35mm
Capacity: Drywall Screw	6mm
Power Input	620W
No-Load Speed	0-6000/min
Overall Length	328mm
Weight	1.4kg

Standard Accessories: No 2 driver bit, sub stopper

W6VB3
TEKS® Screwdriver

- Ideal for TEKS® self-drilling screws
- Adjustable depth setting
- Lock-on button
- Ergonomic body design with soft grip handle
- Improved handle geometry for greater operator comfort
- Aluminium gear casing
- Detachable sub stopper
- Extra long 7.5m power cord

Bit Shank	6.35mm
Capacity: TEKS/Drywall/Wood Screw	6mm
Power Input	620W
No-Load Speed	0-4500/min
Overall Length	312mm
Weight	1.4kg

Standard Accessories: Magnetic hex socket, sub stopper

W8VB2
TEKS® Screwdriver

- Ideal for TEKS® self-drilling screws
- Adjustable depth setting
- Lock-on button
- Ergonomic body design with soft grip handle
- Improved handle geometry for greater operator comfort
- Aluminium gear casing
- Detachable sub stopper
- Extra long 7.5m power cord

Bit Shank	6.35mm
Capacity: TEKS/Drywall/Wood Screw	8mm
Power Input	620W
No-Load Speed	0-1700/min
Overall Length	312mm
Weight	1.5kg

Standard Accessories: Magnetic hex socket, sub stopper

HSS DRILL BITS FOR GENERAL USE		
Part No	Qty	Size
780462	6 pcs	2/3/4/5/6/8
780460	19 pcs	1 - 10 mm
780461	25 pcs	1 - 13 mm
780465	5 pcs	1/4"hexagonal 3/4/5/6/8

HSS-Co COBALT DRILL BITS FOR STAINLESS STEEL		
Part No	Qty	Size
780698	19 pcs	1 - 10 mm
780699	25 pcs	1 - 13 mm

MASONRY DRILL BIT SETS		
Part No	Qty	Size
780890	5 pcs	4 / 5 / 6 / 8 / 10
780898	5 pcs	4 / 5 / 6 / 8 / 10
780899	8 pcs	3 / 4 / 5 / 6 / 7 / 8 / 9 / 10

CHUCKS AND ADAPTORS	
Part No	Size
3/8" x 24 UNF	
752072	1,0 - 10 mm
752078	1,0 - 10 mm
752079	1,0 - 10 mm
1/2" x 20 UNF	
752056	1,5 - 13 mm
752057	1,0 - 10 mm
752058	1,5 - 13 mm
752061	1,0 - 10 mm
752066	1,5 - 13 mm
752062	1,0 - 10 mm
752063	1,5 - 13 mm
752064	1,5 - 13 mm
752065	1,5 - 13 mm
752067	1,5 - 13 mm
752068	1,0 - 13 mm
752070	1,0 - 13 mm
Hexagonal 1/4"	
752082	1,0 - 10 mm
752083	1,0 - 10 mm
SDS-Plus	
752097	1,5 - 13 mm
752098	2,5 - 13 mm
752099	1,5 - 13 mm
Chuck wrench	
752051	6 x 80 mm
752052	7 x 110 mm
Screw	
744087	M6x25 Left Hand Thread

HITACHI 5.00 HSS

DH24PB3

SDS-Plus Rotary Hammer Drill-Two mode

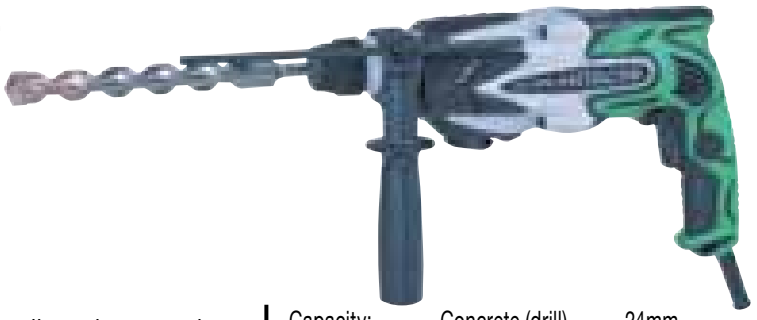

- Soft grip on handle and gear casing
- Push lock bit receptor
- Compact design
- Powerful 800W motor
- Variable speed and reverse
- Two mode action (rotary and hammer drilling)
- Safety clutch
- Efficient dust and grease seal design
- Drill bit not included

Capacity:	Concrete (drill)	24mm
	Concrete (TCT core)	50mm
	Steel	13mm
	Wood	32mm
Power Input		800W
No-Load Speed		0-1150/min
Full Load Impact Rate		0-4600/min
Impact Energy		3.2J
Overall Length		351mm
Weight		2.4kg

Standard Accessories: side handle, depth stop, carrying case

DH24PM

SDS-Plus Rotary Hammer Drill-Quick change chuck

QUICK CHANGE CHUCK
SDS-PLUS • 13MM

- Available in 110V only
- Supplied with SDS-Plus and 13mm metal chucks
- Two action mechanism locks chuck securely in place and allows quick and easy release
- Powerful 800W motor
- Three mode action
- Efficient dust and grease seal design
- Drill bit not included

Capacity:	Concrete (drill)	24mm
	Concrete (TCT core)	50mm
	Steel	13mm
	Wood	32mm
Power Input		800W
No-Load Speed		0-1150/min
Full Load Impact Rate		0-4600/min
Impact Energy		3.2J
Overall Length:	SDS-Plus	384mm
	13mm Chuck	430mm
Weight		2.6kg

Standard Accessories: side handle, depth stop, carrying case

DH24PC3

SDS-Plus Rotary Hammer Drill-Three mode

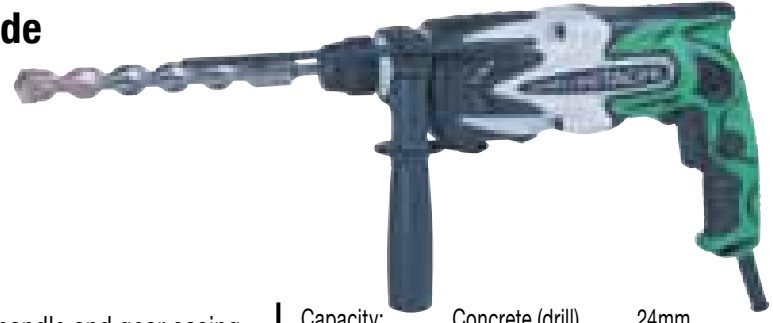

- Soft grip on handle and gear casing
- Push lock bit receptor
- Compact design
- Powerful 800W motor
- Variable speed and reverse
- Three mode action (rotary drilling, hammer drilling & chiselling)
- Safety clutch
- Efficient dust and grease seal design
- Drill bit not included

Capacity:	Concrete (drill)	24mm
	Concrete (TCT core)	50mm
	Steel	13mm
	Wood	32mm
Power Input		800W
No-Load Speed		0-1150/min
Full Load Impact Rate		0-4600/min
Impact Energy		3.2J
Overall Length		351mm
Weight		2.4kg

Standard Accessories: side handle, depth stop, carrying case

DH25PB

SDS-Plus Rotary Hammer Drill

- Compact design
- Variable speed
- Two mode action (rotary and hammer drilling)
- Safety clutch
- Drill bit not included

Capacity:	Concrete (drill)	25mm
	Steel	13mm
	Wood	32mm
Power Input		650W
No-Load Speed		0-1100/min
Full Load Impact Rate		0-4000/min
Impact Energy		3.0J
Overall Length		318mm
Weight		3.4kg

Standard Accessories: side handle, depth stop, dust cup, carrying case

DH28PC

SDS-Plus Rotary Hammer Drill

- High drilling speed
- Compact design
- Forward and reverse
- Idle striking prevention mechanism extends service life
- 3 mode function - rotary drilling, hammer drilling and hammer only
- High impact energy of 3.5 Joules
- Drill bit not included

Capacity:	Concrete (drill)	4-28mm
	Concrete (TCT core)	80mm
	Steel	13mm
	Wood	32mm
Power Input		720W
No-Load Speed		0-1050/min
Full Load Impact Rate		0-4000/min
Impact Energy		3.5J
Overall Length		316mm
Weight		3.5kg

Standard Accessories: side handle, depth stop, carrying case

DH28PD

SDS-Plus Rotary Hammer Drill

DUST
COLLECTION
FACILITY

- Compact hammer drill with dust cassette
- High drilling speed
- Compact design
- Idle striking prevention mechanism extends service life
- 3 mode function Rotary drilling, Hammer drilling and Hammer only
- High impact energy of 3.5 Joules
- Drill bit not included

Capacity:	Concrete (drill)	4-28mm
	Concrete (TCT core)	80mm
	Steel	13mm
	Wood	32mm
Power Input		720W
No-Load Speed		0-1050/min
Full Load Impact Rate		0-4000/min
Impact Energy		3.5J
Overall Length		316mm
Weight		4.7kg

Standard Accessories: side handle, depth stop, carrying case

Rotary Demolition Hammers

DH38MS
SDS-max Rotary Demolition Hammer

- Powerful 950W motor
- Safety clutch
- Single speed motor
- Two mode action (rotary hammer drilling and hammer only) with neutral position
- Soft grip front and rear handles
- Variable lock mechanism allows chisels to be set at 12 positions for greater convenience
- Drill bit not included

Capacity:	Concrete - Drill Bit	38mm
	Concrete - TCT Core Bit	105mm
Power Input		950W
No-Load Speed		620/min
Full Load Impact Rate		2800/min
Impact Energy		9 Joules
Overall Length		433mm
Weight		6.4kg

Standard Accessories: Side handle, grease pack, carrying case

DH40MR
SDS-max Rotary Demolition Hammer

- Variable speed
- Constant speed control
- Two mode action
- Safety clutch
- Auto stop brushes
- Drill bit not included

Capacity:	Concrete - Drill bit	40mm
	Concrete - TCT Core bit	105mm
Bit Shank		SDS-max
Power Input		950W
No-load Speed		240-480/min
Full Load Impact Rate		1320-2650/min
Impact Energy		10.0J
Overall Length		435mm
Weight		6.5kg

Standard Accessories: 3 hex wrenches, side handle, depth stop, grease pack, carrying case

DH45MR
SDS-max Rotary Demolition Hammer



- Variable speed
- Constant speed control
- Two mode action
- Safety clutch
- Auto stop brushes
- Drill bit not included

Capacity:	Concrete - Drill bit	45mm
	Concrete - TCT Core bit	125mm
Bit Shank		SDS-max
Power Input		1200W
No-load Speed		120-240/min
Full Load Impact Rate		1200-2500/min
Impact Energy		15.5J
Overall Length		500mm
Weight		8.0kg

Standard Accessories: 2 hex wrenches, side handle, depth stop, grease pack, carrying case

DH40MRY
Low Vibration SDS-max Rotary Demolition Hammer



- Variable speed
- Constant speed control
- Two mode action
- Safety clutch
- Auto stop brushes
- Drill bit not included

Capacity:	Concrete - Drill bit	40mm
	Concrete - TCT Core bit	105mm
Bit Shank		SDS-max
Power Input		950W
No-load Speed		240-480/min
Full Load Impact Rate		1320-2650/min
Impact Energy		10.5J
Overall Length		480mm
Weight		6.8kg

Standard Accessories: Side handle, depth stop, grease pack, carrying case

DH50MR
SDS-max Rotary Demolition Hammer

- Variable speed
- Constant speed control
- Two mode action
- Safety clutch
- Auto stop brushes
- Drill bit not included

Capacity:	Concrete - Drill bit	50mm
	Concrete - TCT Core bit	160mm
Bit Shank		SDS-max
Power Input		1400W
No-load Speed		110-230/min
Full Load Impact Rate		1050-2150/min
Impact Energy		20.0J
Overall Length		570mm
Weight		10.0kg

Standard Accessories: Side handle, depth stop, grease pack, carrying case

DH50MRY
Low Vibration SDS-max Rotary Demolition Hammer

- Variable speed
- Constant speed control
- Two mode action
- Safety clutch
- Auto stop brushes
- Drill bit not included

Capacity:	Concrete - Drill bit	50mm
	Concrete - TCT Core bit	160mm
Bit Shank		SDS-max
Power Input		1400W
No-load Speed		110-230/min
Full Load Impact Rate		1050-2150/min
Impact Energy		20.0J
Overall Length		570mm
Weight		10.5kg

Standard Accessories: Side handle, depth stop, grease pack, carrying case

H25PV
SDS-Plus Demolition Hammer

- High impact rate for excellent chipping performance
- Idle hammering prevention extends service life
- Variable lock mechanism allows chisel to be set in eight positions
- Soft touch gripping areas for greater comfort and control

Power Input	500W
Full Load Impact Rate	0-3200/min
Impact Energy	4.0J
Bit Shank	SDS-Plus
Overall Length	351mm
Weight	2.3kg

Standard Accessories: carrying case.

H45MR
SDS-Max Demolition Hammer

- Idle hammering prevention extends service life
- Compact and lightweight design
- Vibration-absorbing handle
- Sturdy aluminium casing
- Variable lock mechanism allows chisels to be set in 12 positions
- Soft grip rear handle
- 360° front handle
- Chisel not included

Power Input	950W
Full Load Impact Rate	3000/min
Impact Energy	12.5J
Bit Shank	SDS-Max
Overall Length	454mm
Weight	5.9kg

Standard Accessories: 3 hex bar wrenches, side handle assy, bull point, carrying case.

H45MRY
Low Vibration SDS-Max Demolition Hammer

- Compact and lightweight design
- Low vibration design
- Sturdy aluminium casing
- Variable lock mechanism allows chisels to be set in 12 positions
- 360° front handle
- Auto stop carbon brushes
- Chisel not included

Power Input	950W
Full Load Impact Rate	3000/min
Impact Energy	12.7J
Bit Shank	SDS-Max
Overall Length	475mm
Weight	5.9kg

Standard Accessories: Side handle assy, bull point, carrying case.

H60MRV
SDS-Max Demolition Hammer

- Variable speed with constant speed control
- Maximum impact energy of 26 Joules for high demolition efficiency
- Original design anti-vibration system
- Fully adjustable D-type front handle
- Soft grip rear handle
- Durable aluminium alloy casing with double insulated internal construction
- Chisel not included

Power Input	1350W
Full Load Impact Rate	930-1650/min
Impact Energy	7-26J
Bit Shank	SDS-Max
Overall Length	576mm
Weight	10.5kg

Standard Accessories: bull point, hex wrench, steel carrying case

H65SD2
Heavy Duty Breaker

- Accepts 3 types of 28mm hex bit: standard, collarless retaining groove and air tool
- Anti-vibration handles for excellent vibration reduction
- Durable aluminium housing with double insulated internal construction
- Auto stop carbon brushes
- Chisel not included

Power Input	1340W
Full Load Impact Rate	1400/min
Impact Energy	42.0J
Bit Shank	28mm Hex
Overall Length	823mm
Weight	18.5kg

Standard Accessories: 2 wrenches, carrying case

H70SD
Heavy Duty Breaker

- Accepts 3 types of 28mm hex shank:
  Air tool shank bit
  Standard hex shank bit (combo type)
  Retaining groove bit without collar
- Dustproof double air vent construction protects against entry of concrete chips
- Chisel not included

Power Input	1240W
Full Load Impact Rate	1400/min
Impact Energy	42.0J
Overall Height	722mm
Weight	20.0kg

Standard Accessories: 2 wrenches

SDS-Plus & SDS-Max Drill Bits

SDS-PLUS MASONRY DRILL BITS	
Part No	Size
750100	4 x 110mm
751701	4 x 160mm
750101	5 x 110mm
750102	5 x 160mm
751703	5 x 210mm
751704	5 x 310mm
750103	5.5 x 110mm
750104	5.5 x 160mm
751706	5.5 x 260mm
750105	6 x 110mm
750106	6 x 160mm
750107	6.5 x 110mm
750108	6.5 x 160mm
751712	6.5 x 260mm
751713	6.5 x 310mm
750109	7 x 110mm
750110	7 x 160mm
750112	8 x 160mm
750114	8 x 260mm
750115	8 x 300mm
750117	9 x 210mm
751718	9.5 x 160mm
750119	10 x 160mm
750121	10 x 260mm
750126	12 x 160mm
750128	12 x 260mm
750130	12 x 450mm
750135	14 x 310mm
750136	14 x 450mm
751727	15 x 210mm
751728	15 x 450mm
750141	16 x 300mm
750142	16 x 450mm
750144	18 x 300mm
750145	18 x 450mm
750149	20 x 200
750150	20 x 300mm
750151	20 x 450 mm
750153	22 x 250 mm
750154	22 x 450 mm
750157	25 x 260mm
750158	25 x 450 mm

SDS-MAX MASONRY DRILL BITS			
Part no	Diameter	Length	Working Length
751042	16	720	600
750922	18	340	200
750923	18	540	400
751043	18	720	600
750925	20	320	200
750926	20	520	400
751044	20	720	600
750928	22	320	200
750929	22	520	400
751078	22	720	600
750931	24	320	200
750932	24	520	400
750933	25	320	200
750934	25	520	400
751080	25	720	600
751082	26	520	400
750936	28	370	250
750937	28	570	450
750938	28	670	550
750939	30	370	250
750940	30	570	450
751085	30	720	600
750941	32	370	250
750942	32	570	450
751087	32	720	600
750944	35	370	250
750945	35	570	450
750946	35	670	550
751092	37	370	250
751093	37	570	450
750947	38	370	250
750948	38	570	450
751095	38	720	600
750949	40	370	250
750950	40	570	450
751096	40	720	600
750951	40	920	800
751021	45	570	450
751022	50	570	450
751099	52	570	450

G10SR3
100mm Angle Grinder

- High power 730W motor
- High overload durability
- Compact and lightweight
- Side mounted on/off switch
- Spindle lock

Wheel Diameter	100mm
Arbor	16mm
Power Input	730W
No-Load Speed	10000/min
Spindle Thread	M10 x 1.5
Overall Length	254mm
Weight	1.4kg

Standard Accessories: wrench, side handle

G12SS
115mm Angle Grinder

- High power 580W motor
- Excellent overload durability
- Compact and lightweight
- Side mounted on/off switch
- Spindle lock

Wheel Diameter	115mm
Arbor	22mm
Power Input	580W
No-Load Speed	11000/min
Spindle Thread	M14 x 2
Overall Length	254mm
Weight	1.4kg

Standard Accessories: wrench, side handle

G12SR3
115mm Angle Grinder

- High power 730W motor
- High overload durability
- Compact and lightweight
- Side mounted on/off switch
- Spindle lock

Wheel Diameter	115mm
Arbor	22mm
Power Input	730W
No-Load Speed	10000/min
Spindle Thread	M14 x 2
Overall Length	254mm
Weight	1.4kg

Standard Accessories: wrench, side handle

G12S2
115mm Angle Grinder

- Two position side handle
- Spindle lock

Wheel diameter	115mm
Arbor	22mm
Power Input	800W (230V) 760W (110V)
No-Load Speed	11000/min
Spindle Thread	M14 x 2
Overall Length	250mm
Weight	1.6kg

Standard Accessories: abrasive wheel, wrench, side handle

G12SE2
115mm Angle Grinder

- Quick release wheel guard
- Two position side handle
- Spindle lock
- Lock-off paddle switch

Wheel diameter	115mm
Arbor	22mm
Power Input	1200W (230V) 1050W (110V)
No-Load Speed	11000/min (230V) 10000/min (110V)
Spindle Thread	M14 x 2
Overall Length	321mm
Weight	1.9kg

Standard Accessories: abrasive wheel, wrench, side handle

G13SB3
125mm Angle Grinder

- Two position side handle
- Spindle lock

Wheel diameter	125mm
Arbor	22mm
Power Input	1300W (230V) 830W (110V)
No-Load Speed	11000/min (230V) 10000/min (110V)
Spindle Thread	M14 x 2
Overall Length	283mm
Weight	1.9kg

Standard Accessories: abrasive wheel, wrench, side handle

G13SE2
125mm Angle Grinder

- Quick release wheel guard
- Two position side handle
- Spindle lock
- Lock-off paddle switch

Wheel diameter	125mm
Arbor	22mm
Power Input	1200W (230V) 1050W (110V)
No-Load Speed	11000/min (230V) 10000/min (110V)
Spindle Thread	M14 x 2
Overall Length	283mm
Weight	1.9kg

Standard Accessories: abrasive wheel, wrench, side handle

G13YC
125mm Angle Grinder

- Soft start
- Electronic speed control
- Quick release wheel guard
- Two position front handle
- Spindle lock

Wheel diameter	125mm
Arbor	22mm
Power Input	1500W
No-Load Speed	10000/min
Spindle Thread	M14 x 2
Overall Length	321mm
Weight	2.0kg

Standard Accessories: abrasive wheel, wrench, side handle

G13SC2
125mm Angle Grinder

- Back handle design
- Three position front handle
- Spindle lock

Wheel diameter	125mm
Arbor	22mm
Power Input	1200W
No-Load Speed	10000/min
Spindle Thread	M14 x 2
Overall Length	381mm
Weight	2.7kg

Standard Accessories: abrasive wheel, wrench, side handle

G12SS/CD
115mm Angle Grinder Kit

⧈ ISP

- Powerful 580W motor
- Excellent overload durability
- Compact and lightweight
- Top mounted on/off switch
- Spindle lock
- Includes segmented diamond wheel and carrying case

Wheel Diameter	115mm
Arbor	22mm
Power Input	580W
No-Load Speed	11000/min
Spindle Thread	M14 x 2
Overall Length	254mm
Weight	1.4kg

Standard Accessories: wrench, side handle

G12SR3/CD
115mm Angle Grinder Kit

⧈ ISP

- High power 730W motor
- Class leading overload durability
- Compact and lightweight
- Side mounted on/off switch
- Spindle lock
- Includes segmented diamond wheel and carrying case

Wheel Diameter	115mm
Arbor	22mm
Power Input	730W
No-Load Speed	10000/min
Spindle Thread	M14 x 2
Overall Length	254mm
Weight	1.4kg

Standard Accessories: wrench, side handle

G23SS/CD
230mm Angle Grinder Kit

⧈ ISP

- High overload durability
- Three position front handle
- Spindle lock
- Includes segmented diamond wheel and carrying case

Wheel diameter	230mm
Arbor	22mm
Power Input	2000W
No-Load Speed	6600/min
Spindle Thread	M14 x 2
Overall Length	463mm
Weight	4.3kg

Standard Accessories: wrench, side handle

Angle Grinders

G18SE3
180mm Angle Grinder

⧈ ISP

- Anti-vibration front handle
- Three position front handle
- Spindle lock
- Abrasive wheel not included

Wheel diameter	180mm
Arbor	22mm
Power Input	2300W
No-Load Speed	8500/min
Spindle Thread	M14 x 2
Overall Length	478mm
Weight	5.2kg

Standard Accessories: wrench, side handle

G23SS
230mm Angle Grinder

⧈ ISP

- High overload durability
- Three position front handle
- Spindle lock
- Abrasive wheel not included

Wheel diameter	230mm
Arbor	22mm
Power Input	2000W
No-Load Speed	6600/min
Spindle Thread	M14 x 2
Overall Length	463mm
Weight	4.3kg

Standard Accessories: wrench, side handle

G23SC3
230mm Angle Grinder

⧈ ISP

- Quick release wheel guard
- Anti-vibration front handle
- Three position front handle
- Spindle lock
- Abrasive wheel not included

Wheel diameter	230mm
Arbor	22mm
Power Input	2300W
No-Load Speed	6600/min
Spindle Thread	M14 x 2
Overall Length	478mm
Weight	5.2kg

Standard Accessories: wrench, side handle

G23MR
230mm Angle Grinder

⧈ ISP

- Double insulated aluminium motor housing
- Insulation equivalent to plastic housing
- Greater strength and heat resistance
- Quick release wheel guard
- Anti-vibration front handle
- Three position front handle
- Spindle lock
- Abrasive wheel not included

Wheel diameter	230mm
Arbor	22mm
Power Input	2400W
No-Load Speed	6600/min
Spindle Thread	M14 x 2
Overall Length	492mm
Weight	5.4kg

Standard Accessories: wrench, side handle

G23UB2
230mm Angle Grinder

⧈ ISP ⚛

- Quick release wheel guard
- Soft start
- Anti-vibration front handle
- Three position front handle
- Spindle lock
- Abrasive wheel not included

Wheel diameter	230mm
Arbor	22mm
Power Input	2500W
No-Load Speed	6600/min
Spindle Thread	M14 x 2
Overall Length	478mm
Weight	5.2kg

Standard Accessories: wrench, side handle

GP2S2
Die Grinder

- Extended front housing to access recessed work
- Slim, easy to grip housing
- External brush caps
- Large auto return lock-on slide switch
- 25000rpm for efficient grinding and polishing

Max Wheel Diameter	25mm
Chuck Size	6mm
Power Input	520W
No-Load Speed	25000/min
Overall Length	359mm
Weight	1.7kg

Standard Accessories: 2 wrenches

CD7SA
Metal Cutting Saw

- Compact size
- Lightweight design
- LED spotlight
- Soft grip handle

Wheel Diameter	185mm
Max Cutting Depth	63mm
Power Input	1140W (230V) 1100W (110V)
No-Load Speed	3700/min
Weight	4.0kg

Standard Accessories: 38 tooth saw blade, guide, wrench, safety glasses

CM5SB
Disc Cutter

- High dust extraction rate
- Spindle lock
- Wheel not included

Wheel Diameter	125mm
Max Cutting Depth	33mm
Power Input	1300W (230V) 830W (110V)
No-Load Speed	11000/min (230V) 10000/min (110V)
Weight	2.9kg

Standard Accessories: dust collection adapter, wrench, side handle, carrying case

CM9SR
Disc Cutter

- High dust extraction rate
- Wide base for extra stability
- Spindle lock
- Wheel not included

Wheel Diameter	230mm
Max Cutting Depth	60mm
Power Input	2000W
No-Load Speed	6600/min
Weight	7.7kg

Standard Accessories: dust collection adapter, wrench, pipe handle, carrying case

CC14SF
Cut-Off Machine

- Spindle lock
- Spark guard
- Quick lock adjustable vice
- 0-45° mitre facility

Blade/Wheel Type		Cut-Off
Blade/Wheel Diameter		355mm
Arbor		25.4mm
Cut Depth:	Round Pipe	115mm
	Shaped Steel	115 x 130mm
Power Input		2000W (230V) 1640W (110V)
No-Load Speed		3800/min
Weight		16kg

Standard Accessories: bar wrench, cut-off wheel

CM12Y
Cut-Off Machine

- High power 2400W soft start motor
- Accepts both 20 and 22mm bore discs/blades
- Mid position front and rear handles
- Fully adjustable safety guard
- Dust extraction port
- Spindle lock
- External brush caps
- Wheel not included

Wheel Diameter	305mm
Arbor	20/22mm
Max Cutting Depth	100mm
Power Input	2400W
No-Load Speed	5000/min
Weight	11.5kg

Standard Accessories: dust collection adapter, spanner, protective goggles.

Impact Wrenches

CN16SA
Nibbler

- Slimline grip
- Three position indexing die holder
- Cuts corrugated and trapezoidal section materials
- External brush caps

Capacity:	Mild Steel	1.6mm
	Stainless	1.2mm
	Aluminium Plate	2.3mm
Min Cutting Radius		40mm
Power Input		400W
No-Load Speed		2300/min
Cutting Speed		1.8m/min
Overall Length		250mm
Weight		1.7kg

Standard Accessories: die, punch, two wrenches

CE16SA
Shear

- Slimline grip
- 8 cutting edges per blade for extended life
- Up to 3200m cutting per set of blades
- External brush caps

Capacity:	Mild Steel	1.6mm
	Stainless	1.2mm
	Aluminium Plate	2.3mm
Min Cutting Radius		25mm
Power Input		400W
No-Load Speed		4700/min
Cutting Speed		6.3m/min
Overall Length		250mm
Weight		1.7kg

Standard Accessories: blade set, thickness gauge, wrench.

VB16Y
Rebar Cutter/Bender

- Slip clutch prevents machine overload
- Fast bend time
- Multiple cut & bend system
- Bend angle set by dial
- 110V only

Multiple cut and bend system:

	Cutting	Bending
ϕ10mm	2 pieces	3 pieces
ϕ12mm	1 piece	2 pieces
ϕ16mm	1 piece	1 piece
Input Power		510W motor
Bend time (180° bend in 16mm rebar)		5.1 seconds
Bend Diameter		38/50/62mm
Weight		17kg
Maximum Bend		180°
Capacity (grade 460 rebar)		8-16mm
Anticipated Cutter Life		8000 cuts

Standard Accessories: hex wrench, cutter set

WR16SA
" Impact Wrench

- Reverse
- High power design - 360Nm (266 ft-lbs)
- Soft grip handle for greater comfort and control
- Innovative body design
- " square drive

Capacity:	Ordinary Bolt	M12-M22
	High Tensile	M12-M16
Torque		360Nm (266ft-lbs)
Square Drive		" (12.7mm)
Power Input		480W
No-Load Speed		1900/min
Full-Load Impact Rate		2100/min
Overall Length		258mm
Weight		2.8kg

Standard Accessories: wrench, side handle

WR22SA
" Impact Wrench

- Reverse facility
- Powerful impact energy of 610Nm (450 ft-lbs)
- Soft grip handle for greater comfort and control
- Innovative body design
- " square drive

Capacity:	Ordinary Bolt	M14-M24
	High Tensile	M16-M22
Torque		610Nm (266ft-lbs)
Square Drive		" (12.7mm)
Power Input		850W
No-Load Speed		1800/min
Full-Load Impact Rate		2000/min
Overall Length		302mm
Weight		4.8kg

Standard Accessories: side handle, carrying case

ABRASIVE WHEELS	
Part No	Description
752501	Cutting Wheel (Inox) 115 x 1
752502	Cutting Wheel (Inox) 125 x 1
752505	Cutting Wheel (Inox) 115 x 1.5
752506	Cutting Wheel (Inox) 125 x 1.5
752509	Cutting Wheel (Inox) 150 x 1.5 Flat
752507	Cutting Wheel (Inox) 180 x 1.5
752508	Cutting Wheel (Inox) 230 x 1.9
752511	Cutting Wheel (Metal) 115 x 2.5 Flat
752512	Cutting Wheel (Metal) 125 x 2.5 Flat
752513	Cutting Wheel (Metal) 150 x 2.5 Flat
752514	Cutting Wheel (Metal) 180 x 3 Flat
752515	Cutting Wheel (Metal) 230 x 3 Flat
752521	Cutting Wheel (Metal) 115 x 2.5 Dpc
752522	Cutting Wheel (Metal) 125 x 2.5 Dpc
752524	Cutting Wheel (Metal) 180 x 3 Dpc
752525	Cutting Wheel (Metal) 230 x 3 Dpc
752531	Cutting Wheel (Stone) 115 x 3 Flat
752532	Cutting Wheel (Stone) 125 x 3 Flat
752534	Cutting Wheel (Stone) 180 x 3 Flat
752535	Cutting Wheel (Stone) 230 x 3 Flat
752541	Cutting Wheel (Stone) 115 x 3 Dpc
752542	Cutting Wheel (Stone) 125 x 3 Dpc
752544	Cutting Wheel (Stone) 180 x 3 Dpc
752545	Cutting Wheel (Stone) 230 x 3 Dpc
752551	Grinding Wheel (Metal) 115 x 6
752552	Grinding Wheel (Metal) 125 x 6
752553	Grinding Wheel (Metal) 150 x 6
752554	Grinding Wheel (Metal) 180 x 6
752555	Grinding Wheel (Metal) 230 x 6

DIAMOND WHEELS				
Part No	Diameter	Bore Size	Segment Height	Application
752871	100	22.2	4.5	Concrete Premium
752886	110	22.2	5	Tile Premium
752811	115	22.2	10	Universal Premium
752801	115	22.2	7	Universal
752851	115	22.2	10	Concrete Premium
752841	115	22.2	6	Concrete Premium
752821	115	22.2	6	Concrete
752861	115	22.2	10	Abrasive Premium
752876	115	22.2	5	Concrete Premium
752812	125	22.2	10	Universal Premium
752802	125	22.2	7	Universal
752852	125	22.2	10	Concrete Premium
752842	125	22.2	6	Concrete Premium
752822	125	22.2	6	Concrete
752862	125	22.2	10	Abrasive Premium
752887	125	22.2	5	Tile Premium
752872	125	22.2	4.5	Concrete Premium
752877	125	22.2	5	Concrete Premium
752814	180	22.2	10	Universal Premium
752804	180	22.2	7	Universal
752854	180	22.2	10	Concrete Premium
752844	180	22.2	6	Concrete Premium
752824	180	22.2	6	Concrete
752864	180	22.2	10	Abrasive Premium
752815	230	22.2	10	Universal Premium
752805	230	22.2	7	Universal
752855	230	22.2	10	Concrete Premium
752845	230	22.2	6	Concrete Premium
752825	230	22.2	6	Concrete
752865	230	22.2	10	Abrasive Premium
752816	300	20.0	10	Universal Premium
752817	300	22.2	10	Universal Premium
752856	300	20.0	10	Concrete Premium
752857	300	22.2	10	Concrete Premium
752866	300	20.0	10	Abrasive Premium
752867	300	22.2	10	Abrasive Premium



Grinding Accessories

WHEEL NUTS, WASHERS & PIN SPANNERS		
321795	Wheel Nut	G10SR3
320497	Wheel Washer	
313933	Pin Spanner	
994324	Wheel Nut	G12SR3, G12SS, G12S2, G12SQ, G12SE2. G13SB3, G13SE2, G13YC
937817Z	Wheel Washer	
938332Z	Pin Spanner	
310338	Super Wheel Washer	
937909Z	Wheel Nut	G13SC2, G18SE3, G23SS, G23SC3, G23MR, G23UB2, G23SCY
937907Z	Wheel Washer	
937913Z	Pin Spanner	
310337	Super Wheel Washer	
HANDLES		
323993	Loop Handle for 180mm & 230mm Grinders	G18SE3, G23SS, G23SC3, G23MR, G23UB2, G23SCY
325496	Smal anti-vibration handle	All 100/115/125mm grinders except G13SC2
322411	Large anti-vibration handle	G13SC2 plus all 180/230mm grinders
CASES		
KCS918	Injection moulded case	All 100/115/125mm grinders except G13SC2
KCS923	Blow moulded case	G13SC2 plus all 180/230mm grinders
BACKING PADS & WASHER NUTS		
936558Z	100mm Rubber Flexible Pad	G10SR3
935513	Washer Nut for 936558Z	
753806	115mm Rubber Flexible Pad	G12SR3, G12SS, G12S2, G12SQ, G12SE2. G13SB3, G13SE2, G13YC
937826Z	Washer Nut for 937825Z	

CUT-OFF DISCS			
985609	Cut-off Disc Metal	305mm	CM12Y
752572	Cut-off Disc Metal	350mm	CC14SF

DIE GRINDER COLLET CHUCKS		
331421	Collet chuck 6mm	GP2S2
985135	Collet chuck 8mm	GP2S2
991377	Collet chuck 6mm	X100

NIBBLER & SHEAR ACCESSORIES		
998030	Punch	CN16SA
998039	Die Assembly	CN16SA
998000	Moving Blade	CE16SA
998001	Stationary Blade	CE16SA

C10FCE2
Compound Mitre Saw

- Light weight for portability
- Pivoting sub fence
- Mitre cuts up to 52° right & left
- Thumb actuated positive stops for easy angle setting
- Dust guide for improved dust collection

Cross Cut	59 x 144/89 x 101mm
Mitre Cut (45°)	59 x 102/89 x 70mm
Bevel Cut (45°)	41 x 144mm
Compound Cut	41 x 102mm
Blade Diameter	255mm
Bore Size	30mm
Power Input	1520W
No-Load Speed	5000/min
Weight	11.2kg

Standard Accessories: 24 tooth TCT saw blade, dust bag, vice assy, wrench, sub fence

C10FCH2
Compound Mitre Saw

LASER MARKER

- Light weight for portability
- Pivoting sub fence
- Laser marker for accurate cutting
- Mitre cuts up to 52° right & left
- Thumb actuated positive stops for easy angle setting
- Dust guide for improved dust collection

Cross Cut	59 x 144/89 x 101mm
Mitre Cut (45°)	59 x 102/89 x 70mm
Bevel Cut (45°)	41 x 144mm
Compound Cut	41 x 102mm
Blade Diameter	255mm
Bore Size	30mm
Power Input	1520W
No-Load Speed	5000/min
Weight	11.3kg

Standard Accessories: 24 tooth TCT saw blade, dust bag, vice assy, wrench, sub fence

C12FCH
Compound Mitre Saw

LASER MARKER

- Laser marker for accurate cuts
- Pivoting fence
- Soft grip handle
- Large table for improved stability
- Thumb actuated positive stops for easy angle setting
- Saw cover lock for extra safety

Capacity:	Cross Cut	61.5 x 200/96 x 155mm
	Mitre Cut	61.5 x 140mm
	Bevel Cut	40 x 200mm
	Compound Cut	40 x 140mm
Blade Diameter		305mm
Bore Size		30mm
Power Input		1520W
No-Load Speed		4000/min
Weight		19kg

Standard Accessories: TCT saw blade, dust bag, vice assy, 2 wrenches

C12LC
Compound Mitre Saw

DIGITAL DISPLAY

- Digital display
- Pivoting sub fence
- Mitre cuts up to 52° right & left
- Thumb actuated positive stops for easy angle setting
- 110V only

Capacity:	Cross Cut	61.5 x 200/96 x 155mm
	Mitre Cut	61.5 x 140mm
	Bevel Cut	40 x 200mm
	Compound Cut	40 x 140mm
Blade Diameter		305mm
Bore Size		30mm
Power Input		1520W
No-Load Speed		4000/min
Weight		19kg

Standard Accessories: TCT saw blade, dust bag, vice assy, 2 wrenches

C12LCH
Compound Mitre Saw

LASER MARKER

DIGITAL DISPLAY

- Laser marker for accurate cuts
- Digital display
- Pivoting sub fence
- Mitre cuts up to 52° right & left
- Thumb actuated positive stops for easy angle setting
- Soft grip handle

Capacity:	Cross Cut	61.5 x 200/96 x 155mm
	Mitre Cut	61.5 x 140mm
	Bevel Cut	40 x 200mm
	Compound Cut	40 x 140mm
Blade Diameter		305mm
Bore Size		30mm
Power Input		1520W
No-Load Speed		4000/min
Weight		19kg

Standard Accessories: TCT saw blade, dust bag, vice assy, 2 wrenches

C8FSE
Slide Compound Mitre Saw

- Twin horizontal rails give a maximum cut width of 312mm
- Left bevel cutting up to 48°
- Lightweight design
- Soft grip handle
- Cut depth adjustment for groove cutting

Capacity:	Cross Cut	65 x 312mm
	Mitre Cut (45° l/R)	65 x 220mm
	Bevel Cut (45°L)	45 x 312mm
Compound Cut:		
	Mitre	Bevel
	45° L	45° L 45 x 220mm
	45° R	45° R45 x 220mm
Blade Diameter		216mm
Bore Size		30mm
Power Input		1050W
No-Load Speed		5500/min
Weight		14kg

Standard Equipment 24 tooth TCT saw blade, dust bag, vice assy, wrench

C12RSH
Slide Compound Mitre Saw

LASER MARKER

Innovative slide design allows the C12RSH to be placed against a wall with no clearance at the rear

- New slide design requires no clearance at rear
- Laser marker for accurate cutting
- Fine mitre & bevel adjustment
- High fence for extra stability
- Highly efficient dust collection
- Mitre cuts up to 45° left and 57° right
- Cut depth adjustment for groove cutting

Capacity:	Cross Cut	107 x 312mm
	Mitre Cut (45°)	107 x 220mm
	Bevel Cut (45°L)	70 x 312mm
	Bevel Cut (45°R)	45 x 312mm
Compound Cut:		
	Mitre	Bevel
	45°L/45°L	70 x 220mm
	31°R/45°L	70 x 265mm
	45°R/45°R	45 x 220mm
	31°L/45°R	45 x 265mm
Blade Diameter		305mm
Bore Size		30mm
Power Input		1600W
No-Load Speed		3800/min
Weight		29kg

Standard Equipment 60 tooth TCT saw blade, dust bag, vice assy, wrench.

UU610CZ
Universal Workstation

- Universal tool mount accepts all Hitachi mitre saws and most other leading manufacturers
- Dual adjustable extension arms
- Fully adjustable work supports
- Supports work material up to 3.6m (12') long
- Wheel kit included for portability
- Aluminium construction: sturdy yet portable
- Light weight; only 17.5kg
- Folds to only 1.2m long; can be fitted sideways into a van
- Mitre saw can be removed with mount for independent use
- Cam locks allow the saw to be mounted on the table in seconds
- Part no 712600

C7ST
185mm Circular Saw

▣ ISP

NEW

- Steel base with scale
- No riving knife means easier plunge cutting
- Soft grip handle
- Large bevel lever for easy adjustment
- External brush caps for ease of maintenance
- Spindle lock

Blade Diameter		185mm
Bore Size		30mm
Max Cut Depth:	0°/45°	62mm/47.5mm
Power Input:	230V/110V	1710W/1560W
No-Load Speed		6000/min
Overall Length		310mm
Weight		4.6kg

Standard Accessories: 18 tooth TCT saw blade, guide, wrench, carrying case

C7SB2
185mm Circular Saw

▣ ISP

- Heavy duty aluminium base with scale
- No riving knife means easier plunge cutting
- Soft grip handle
- Easy access bevel lever and cutting depth adjustment
- External brush caps for ease of maintenance
- Spindle lock

Blade Diameter		185mm
Bore Size		30mm
Max Cut Depth:	0°/45°	60mm/47mm
Power Input:	230V/110V	1710W/1670W
No-Load Speed		5800/min
Overall Length		305mm
Weight		4.6kg

Standard Accessories: 18 tooth TCT saw blade, guide, wrench, carrying case

C7U2
190mm Circular Saw

▣ ISP

- Heavy duty aluminium base
- Soft grip handle
- Blower ensures cut line is always visible
- Adjustable metal cut line guide
- External brush caps
- Unique angle setting system ensures accuracy of 90° cuts
- Spindle lock for easy blade replacement

Blade Diameter		190mm
Bore Size		30mm
Max Cut Depth:	0°/45°	66mm/48mm
Power Input		1200W
No-Load Speed		5500/min
Overall Length		312mm
Weight		4.0kg

Standard Accessories: 18 tooth TCT saw blade, guide, dust collection adapter, wrench, carrying case

C7BU2
190mm Circular Saw

▣ ISP STOP

- Electric brake for extra safety
- PTFE coated base for smooth cutting operation
- Blower ensures cut line is always visible
- Adjustable metal cut line guide
- External brush caps
- Unique angle setting system ensures accuracy of 90° cuts
- Spindle lock

Blade Diameter		190mm
Bore Size		30mm
Max Cut Depth:	0°/45°	66mm/48mm
Power Input		1200W
No-Load Speed		5500/min
Overall Length		312mm
Weight		4.0kg

Standard Accessories: 18 tooth TCT saw blade, guide, dust collection adapter, wrench, carrying case

C9U2
Circular Saw

▣ ISP

- Heavy duty aluminium base
- Soft grip handle
- Blower ensures cut line is always visible
- Adjustable metal cut line guide
- External brush caps
- Unique angle setting system ensures accuracy of 90° cuts
- Spindle lock for easy blade replacement

Blade Diameter		235mm
Bore Size		30mm
Max Cut Depth:	0°/45°	86mm/65mm
Power Input:	230V/110V	2000W/1670W
No-Load Speed		5000/min
Overall Length		397mm
Weight		6.8kg

Standard Accessories: 20 tooth TCT saw blade, guide, dust collection adapter, wrench, carrying case

C9BU2
235mm (9 ") Circular Saw

▣ ISP STOP



- Electric brake for extra safety
- PTFE coated base for smooth cutting operation
- Blower ensures cut line is always visible
- Adjustable metal cut line guide
- External brush caps
- Unique angle setting system ensures accuracy of 90° cuts
- Spindle lock

Blade Diameter		235mm
Bore Size		30mm
Max Cut Depth:	0°/45°	86mm/65mm
Power Input:	230V/110V	2000W/1670W
No-Load Speed		5000/min
Overall Length		397mm
Weight		6.8kg

Standard Accessories: 20 tooth TCT saw blade, guide, dust collection adapter, wrench, carrying case

NEW DESIGN WITH HIGHER CUTTING CAPACITY

C7UY
190mm Circular Saw

- ✓ Cut depth equivalent to a 210mm (8 ") saw
- ✓ Two step-reduction gears for high torque cutting
- ✓ PTFE coated base for smooth cutting operation
- ✓ Lightest weight in its class
- ✓ Dust blower ensures cut line is always visible
- ✓ Parallel base adjustment for accurate cuts
- ✓ External brush caps for ease of maintenance
- ✓ Spindle lock for easy blade replacement
- ✓ Guide rail adapter included as standard

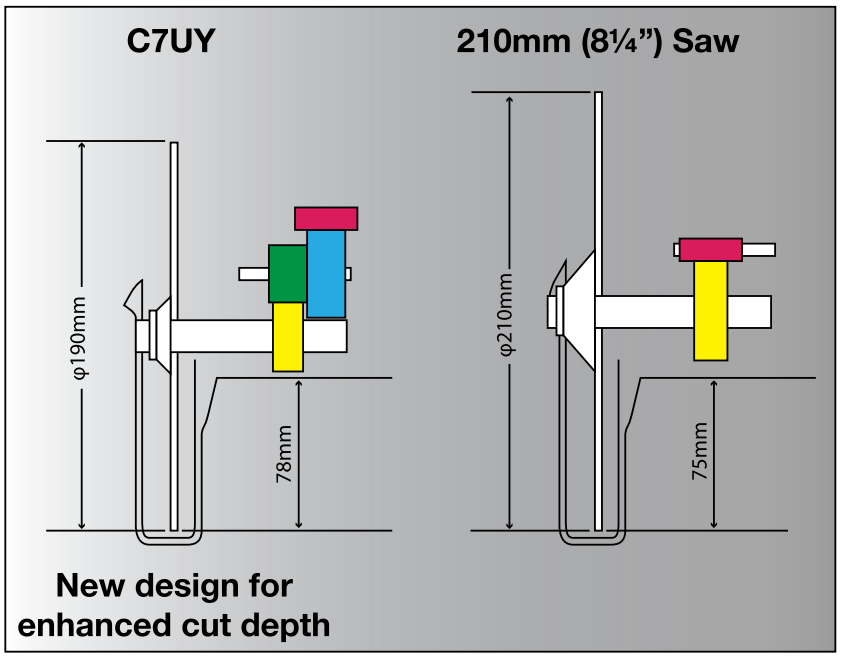

New design for enhanced cut depth

Blade Diameter		190mm
Bore Size		20mm
Max Cut Depth:	0°	78mm
	45°	55mm
Power Input		1300W (230V) 1200W (110V)
No-Load Speed		5500/min
Overall Length		331mm
Weight		4.2kg

Standard Accessories: 18 tooth TCT blade, straight guide, guide rail adapter, dust extraction adapter, wrench, carrying case

CJ90VST
Jigsaw

- Tool free blade lock
- Nickel plated die cast base
- Base adjustable up to 45°
- Variable speed
- Adjustable Orbital action
- Lock-on switch

Capacity:	Wood	90mm
	Mild Steel Plate	8mm
Min Cutting Radius		25mm
Power Input		705W
No-Load Speed		850-3000/min
Length of Stroke		20mm
Overall Length		228mm
Weight		2.2kg

Standard Accessories: blade, wrench, carrying case.

CJ110MV
Jigsaw

- LED spotlight
- Tool free blade lock
- Dust blower
- Nickel plated die cast base
- Base adjustable up to 45°
- Variable speed
- Adjustable Orbital action
- Electronic feedback speed control

Capacity:	Wood	110mm
	Mild Steel Plate	10mm
Min Cutting Radius		25mm
Power Input		720W
No-Load Speed		850-3000/min
Length of Stroke		26mm
Overall Length		240mm
Weight		2.2kg

Standard Accessories: blade, chip cover, table insert (anti splinter), dust collection adapter, wrench, carrying case.

CJ120V
Jigsaw

- Variable speed
- Adjustable Orbital action
- Electronic feedback speed control
- Tool free blade change
- Soft grip handle
- Nickel plated die cast base
- Base adjustable up to 45°

Capacity:	Wood	120mm
	Mild Steel Plate	10mm
Min Cutting Radius		25mm
Power Input	230V/110V	740W/660W
No-Load Speed		850-3000/min
Length of Stroke		26mm
Overall Length		240mm
Weight		2.3kg

Standard Accessories: 3 blades, splinter guard, dust collection adapter, shutter, wrench, carrying case

CR13V2
Reciprocating Saw

- Tool free blade changing system
- Variable speed
- Adjustable front shoe
- Large trigger switch
- External brush caps
- Blade can be fitted facing up or down for extra versatility

Capacity :	Pipe	130mm
	Mild Steel Plate	19mm
	Wood (cut depth)	300mm
Power Input		1010W
No-Load Speed		0-2800/min
Length of Stroke		29mm
Overall Length		435mm
Weight		3.2kg

Standard Accessories: blade, wrench, carrying case

CR13VBY
Low Vibration Reciprocating Saw

UVP
USER VIBRATION PROTECTION

- Full-load tri-axial vibration level 65% lower than previous model
- Swing blade action for high cutting speed
- Tool free blade replacement
- Tool free shoe adjustment
- Durable double moulded front grip for greater comfort
- Trigger & dial variable speed control

Capacity:	Pipe	130mm
	Steel Plate	19mm
	Wood	300mm
Power Input		1150W
No-Load Speed		0-3000/min
Length of Stroke		32mm
Weight		4.4kg

Standard Accessories: blade, carrying case

M12VE

" Variable Speed Router

- Lightweight & compact design
- Variable speed motor with constant speed control
- Adjustable handles can be set for optimum user comfort

Capacity: Collet Chuck	12.7mm (")
Power Input 230V/110V	2000W/1570W
No-Load Speed	8000-22000/min
Plunge Depth	65mm
Overall Height	360mm
Weight	6.3kg

Standard Accessories: straight guide, 1/4" collet, 30mm template guide, wrench, carrying case.

M12V2

" Variable Speed Router

- Variable speed motor with constant speed control
- Ergonomic design with soft grip handles
- New fast and accurate depth adjustment mechanism with metric & imperial scales
- Fine height adjuster
- Dust extraction adapter

Capacity: Collet Chuck	12.7mm (")
Power Input 230V/110V	2000W/1570W
No-Load Speed	8000-22000/min
Plunge Depth	65mm
Overall Height	360mm
Weight	6.3kg

Standard Accessories: straight guide with micro adjuster, 1/4" collet, centering gauge, template guide, wrench, template guide & adapter, dust extraction adapter

M8V2

" Variable Speed Router

- Variable speed
- Electronic speed control
- Spindle lock
- High cutting efficiency to rout smoothly through hardwoods
- Dust extraction adapter included as standard
- Ergonomic design with soft grip handles

Capacity: Collet Chuck	6.35mm (1/4")
Power Input	1150W
No-Load Speed	11000 - 25000/min
Plunge Depth	60mm
Overall Height	290mm
Weight	3.6kg

Standard Accessories: straight guide, template guide, dust extraction, adapter, wrench, carrying case

M12SA2

" Single Speed Router

- Powerful 2000W motor (230V)
- High cutting efficiency to rout smoothly through hardwoods
- Ergonomic design with soft grip handles
- New fast and accurate depth adjustment mechanism with metric & imperial scales
- Fine height adjuster
- Dust extraction adapter

Capacity: Collet Chuck	12.7mm (")
Power Input 230V/110V	2000W/1570W
No-Load Speed	22000/min
Plunge Depth	65mm
Overall Height	360mm
Weight	6.2kg

Standard Accessories: straight guide with micro adjuster, 1/4" collet, centering gauge, template guide, wrench, template guide & adapter, dust extraction adapter

M6SB

Laminate Trimmer

- Rack & pinion type depth adjuster for rapid and accurate cutter depth adjustment
- Clear 45° adjustable base
- Spindle lock
- External brush caps

Capacity: Collet Chuck	6.35mm (")
Power Input	440W
No-Load Speed	30000/min
Base Angle Adjustment	0°-45°
Overall Height	200mm
Weight	1.4kg

Standard Accessories: straight guide, trimmer guide, template guide, wrench

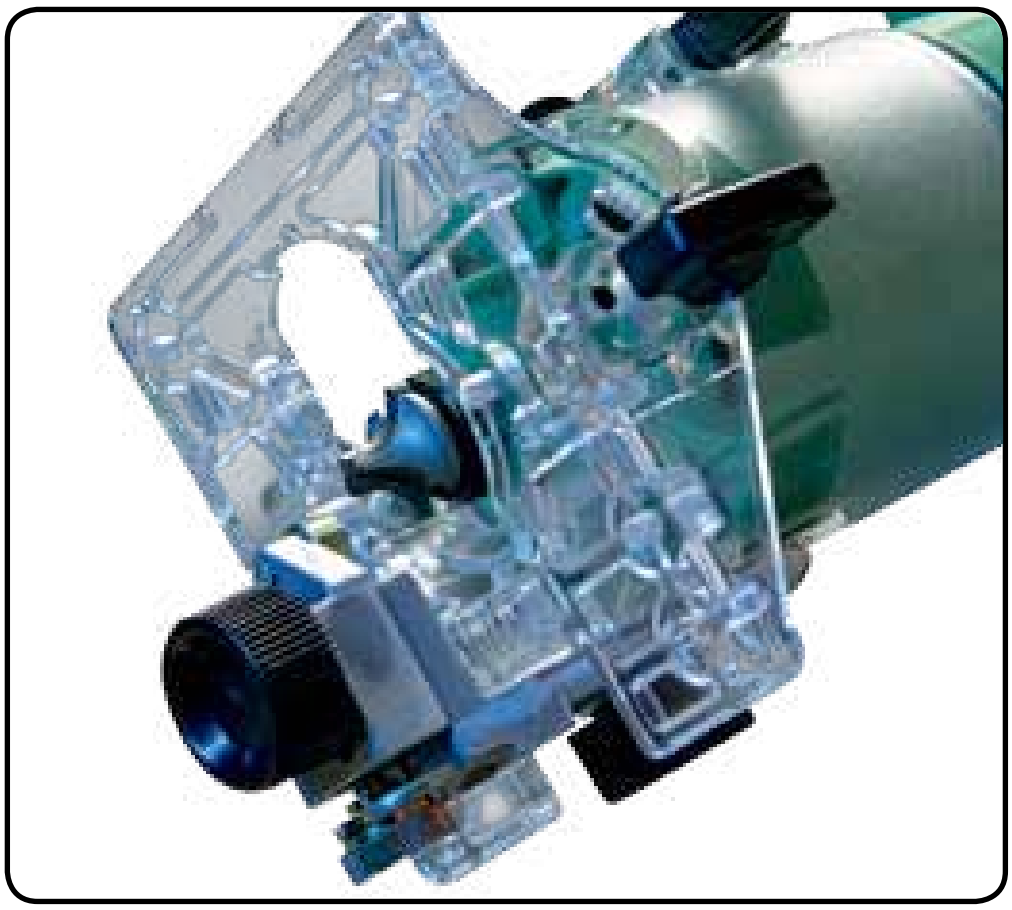

P20SF
Planer

NEW

- Adjustable cutting depth
- Compact & lightweight
- Soft grip handle
- Aluminium base with V groove for chamfering
- Protection foot on base
- High no-load speed for a smooth finish
- Chip & dust ejector port
- Double edged resharpenable blades
- Cable management hook

Cutting Width	82mm
Max Cutting Depth	2.6mm
Rebate	9mm
Power Input	620W
No-Load Speed	17000/min
Overall Length	296mm
Weight	2.5kg

Standard Accessories: blade, wrench, blade setting gauge, guide, carrying case.

P20SA2
Planer

- Powerful 720W motor
- 25mm rebate facility
- Maximum cut depth 3mm
- Cut width 82mm
- Easily replaced dual edged TCT blades
- Optional HSS blades
- Optional dust collection bag

Cutting Width	82mm
Max Cutting Depth	3mm
Rebate	25mm
Power Input	720W
No-Load Speed	14000/min
Overall Length	300mm
Weight	3.0kg

Standard Accessories: wrench, 2 TCT blades, guide

SV13YA
Random Orbit Sander

- Best sanding performance in its class
- Large soft grip handle for greater control and comfort
- Pad control system maintains sanding pad at a controlled speed and minimises gouging on startup
- Includes carrying case
- Variable speed with constant speed control

Pad Diameter	125mm
Power Input	230W
Orbit Diameter	3.2mm
No-Load Speed - Spindle	7000-12000/min
Overall Height	145mm
Weight	1.4kg

Standard Accessories: sanding pad, dust bag, carrying case

SV12SG
Orbital Sander

- High dust extraction rate of 70%
- Contoured body and soft grip for greater operator comfort and ease of use
- Low vibration design
- Punch plate included as standard
- Optional bases available for hook & loop and adhesive

Pad Size	110 x 100mm
Power Input	200W
Orbit Diameter	1.5mm
No-Load Speed - Spindle	14000/min
Overall Height	137mm
Weight	1.1kg

Standard Accessories: sanding paper, dust bag, punch plate

Sanders

SV12SD
Orbital Sander

- Powerful 300W motor with direct drive system for lower vibration
- Efficient dust collection system
- Through base dust extraction
- 2.4mm orbit diameter

Pad Size	114 x 228mm
Power Input	300W
Orbit Diameter	2.4mm
No-Load Speed - Spindle	10000/min
Overall Length	300mm
Weight	2.8kg

Standard Accessories: sanding paper, dust bag

SB8V2
76mm Belt Sander

- Variable speed
- Transparent cover makes sanding position clearly visible
- Large trigger for easy operation
- Soft grip handle
- Dust bag mounted on left for easier sanding in corners

Power Input	1020W
No-load Speed	250 - 450m/min
Belt Size	76 x 533mm
Overall Length	310mm
Weight	4.3kg

Standard Accessories: sanding belt, dust bag

SB10V2
100mm Belt Sander

- Variable speed
- Transparent cover makes sanding position clearly visible
- Large trigger for easy operation
- Soft grip handle
- Dust bag mounted on left for easier sanding in corners

Power Input	1020W
No-load Speed	240 - 420m/min
Belt Size	100 x 610mm
Overall Length	363mm
Weight	5.2kg

Standard Accessories: sanding belt, dust bag

SAY150A
Rotary Orbital Sander

- 7mm diameter random orbital action gives a superior surface finish
- Side handle position left or right
- Vented 150mm (6") diameter backing pad suits all self adhesive abrasive paper
- External brush caps
- 230V only

Disc Size	150mm
Power Input	380W
No-Load Speed	6000/min
Orbit	7mm
Overall Length	279mm
Weight	2.1kg

Standard Accessories: sanding pad, 2 wrenches, sanding disc, side handle

SAT180
Rotary Orbital Sander

- Powerful 750W motor
- Two speed gearbox
- 180mm backing pad accepts polishing mops or sanding discs
- External brush caps

Disc Size	180mm
Power Input	750W
No-Load Speed	1900/3400/min
Spindle Thread	M14 x 2
Overall Length	395mm

Standard Accessories: 5 sanding discs, rubber pad, 2 wrenches, wool bonnet, side handle

SP18VA
Sander/Polisher

- 1250W motor with excellent overload protection
- Loop side handle gives greater control at all angles
- Constant speed control
- Soft start
- Trigger and dial variable speed control
- High bearing durability
- Spindle lock

Disc Size	180mm
Power Input	1250W
No-Load Speed	0-600/3400min
Spindle thread	M14 x 2
Overall Length	415mm
Weight	2.8kg

Standard Accessories: rubber pad, wool bonnet, sanding pad, side handle, pin spanner, wrench

RECIPROCATING SAW BLADES

Part No	Length	Teeth	Material	Pack Qty
METAL CUTTING BLADES				
752008	150mm	24	BIM	5
752009	150mm	14	BIM	5
752012	150mm	24	BIM	5
752013	150mm	18	BIM	5
752014	225mm	18	BIM	5
752015	100mm	14	BIM	5
752016	150mm	14	BIM	5
752017	225mm	14	BIM	5
752018	150mm	Progressor	BIM	5
752019	200mm	8-12	BIM	5
752020	150mm	8	BIM	3
752021	225mm	8	BIM	3
UNIVERSAL CUTTING BLADES				
752022	150mm	10-14	BIM	5
752023	300mm	10-14	BIM	5
752024	200mm	Progressor	BIM	5
752025	150mm	6	BIM	5
752026	150mm	6	BIM	5
752027	300mm	6	BIM	5
752028	225mm	6	BIM	3
WOOD CUTTING BLADES				
752029	225mm	3	HCS	5
752030	150mm	6	HCS	5
752031	300mm	6	HCS	5
752032	250mm	6-4	HCS	5
752033	200mm	Progressor	HCS	5
PLASTER CUTTING BLADES				
752034	150mm	6	HAS	5
INOX CUTTING BLADES				
752035	115mm	18	HM	2
FIBRE GLASS AND PLASTIC CUTTING BLADES				
752036	150mm	6	HM	2
752037	300mm	3	HM	2
752038	400mm	2	HM	2
CAST AND BRICK CUTTING BLADES				
752039	225mm	Gritted	HM-riff	2

JIGSAW BLADES

Part No	Length x Width	Teeth	Material
METAL CUTTING (5 PER PACK)			
750038	76.6 x 1	24	HSS
750039	76.6 x 1	24	BiM
750040	76.6 x 1	14	HSS
750041	91.5 x 1	11-14	BiM
750012	100.4 x 1	8	HSS
750014	132 x 1	14	HSS
750015	132 x 1.3	14	HSS
750025	70 x 0.8	14	HCS
750026	70 x 0.8	24	HCS
750032	132 x 1	14	BiM
WOOD CUTTING (5 PER PACK)			
750043	100.4 x 1.25	6	HCS
750046	100.4 x 1.25	6	HCS
750023	91.5 x 1.25	8	HCS
750027	116.5 x 1.5	8	HCS
750028	132 x 1.7	6	HCS
750036	76.6 x 1.25	18	HCS
750037	100.4 x 1.25	15	BiM
WOOD/PLASTIC CUTTING (5 PER PACK)			
750044	100.4 x 1.5	10	HCS
750019	100.4 x 1.5	10	HCS
750045	100.4 x 1.5	6	HCS
750021	100.4 x 1.25	8	HCS
750042	91.5 x 1	11-14	HCS
750024	91.5 x 1.25	14	HCS
PROGRESSOR BLADES (5 PER PACK)			
750029	116.5 x 1.5	12.7 - 8.5	HCS
750031	132 x 1.25	10.6 - 5.1	BiM
750033	100.4 x 1	21.2 - 9.8	HSS
TILE CUTTING (2 PER PACK)			
750047	82.6 x 0.8	Grit (fine)	HM/TC
750048	82.6 x 0.8	Grit (coarse)	HM/TC
PLASTERBOARD/ FIBRE CEMENT CUTTING (2 PER PACK)			
750030	100.4 x 1.25	6	HM/TC
JIGSAW BLADE SETS			
750049	7 wood, 2 metal, 1 curve cutting blade		

SAW BLADES				
Number	Diameter	Bore	Teeth	Suitable for
752412	165mm	30mm	18	C18DL C18DSL
752413	165mm	30mm	36	
752431	185mm	30mm	18	C7SB2 C7ST
752432	185mm	30mm	36	
752436	190mm	30mm	18	C7U2 C7BU2
752437	190mm	30mm	36	
752446	216mm	30mm	18	C8FSE
752447	216mm	30mm	36	
752449	216mm	30mm	60	
752456	235mm	30mm	18	C9U2 C9BU2
752457	235mm	30mm	36	
752466	255mm	30mm	24	C10FCE2 C10FCH2
752467	255mm	30mm	48	
752471	305mm	30mm	60	C12FCH C12LC C12LCH C12RSH
752480	165mm	20mm	18	C6UY
752481	165mm	20mm	36	C6UY
752482	165mm	20mm	48	C6UY
752483	190mm	20mm	18	C7UY
752484	190mm	20mm	36	C7UY
752485	190mm	20mm	48	C7UY

ROUTER ACCESSORIES		
ROUTER TEMPLATE GUIDES		
303347	7.5 x 9.5 x 4mm	All Hitachi routers
303348	8.0 x 10.0 x 4mm	
303349	9.0 x 11.1 x 4mm	
303350	10.0 x 12.0 x 4mm	
303351	10.7 x 12.7 x 4mm	
303352	12.0 x 14.0 x 4mm	
303353	14.0 x 16.0 x 4mm	
956932	18.5 x 20.0 x 4mm	
956790	16.5 x 18 .0 x 4mm	
303354	22.5 x 24.0 x 4mm	
956933	25.5 x 27.0 x 4mm	
956934	28.5 x 30.0 x 4mm	
303355	38.5 x 40.0 x 4mm	
ROUTER GUIDE FENCE/ASSEMBLY		
971851	Straight Guide Fence	M8V2
956797	Straight Guide Fence	M12SA2, M12V2
956914	Straight Guide Assembly	M12V2
960104	Straight Guide Assembly	M6SB
ROUTER & TRIMMER GUIDE ASSEMBLY		
971868	Trimmer Guide Assembly	M8V2
956794	Trimmer Guide Assembly	M12SA2, M12V2
314613	Trimmer Guide Assembly	M6SB
ROUTER CHUCKS/COLLETS		
956927Z	Chuck Sleeve Reducer 1/2 x 1/4	M12SA2, M12V2
956928Z	Chuck Sleeve Reducer 1/2 x 3/8	
956759	Chuck Sleeve Reducer 1/2 x 8.0mm	

NR90GC2
Cordless Clipped Head Framing Nailer

NiCad Battery 1.4Ah 60 min

- 2 x 1.4Ah NiCad batteries
- 60 minute charger
- Up to 1200 nails per fuel cell
- Longer trigger stroke for safer use
- Dry firing lockout
- Easy to clean
- Easy access fuel cell chamber
- Quick load magazine
- Retractable hook

Nail Length	50-90mm
Nail Type	Clipped head
Nail Collation	Paper collated
Nail Angle	34°
Fuel Cell Capacity	Up to 1200 nails
Magazine Capacity	25-37 nails
Battery	2 x EB714S
Charge Time	60 minutes
Weight	3.5kg
Impact Energy	90 Joules
Actuation Type	Full sequential

Standard Accessories: 2 batteries, UC7SD charger, safety glasses, 4mm hex wrench, oil, carrying case

NR90GR2
Cordless Round Head Framing Nailer

NiCad Battery 1.4Ah 60 min

- 2 x 1.4Ah NiCad batteries
- 60 minute charger
- Up to 1200 nails per fuel cell
- Longer trigger stroke for safer use
- Dry firing lockout
- Easy to clean
- Easy access fuel cell chamber
- Quick load magazine
- Retractable hook

Nail Length	50-90mm
Nail Type	Round head
Nail Collation	Plastic collated
Nail Angle	20°
Fuel Cell Capacity	Up to 1200 nails
Magazine Capacity	32 nails
Battery	2 x EB714S
Charge Time	60 minutes
Weight	3.6kg
Impact Energy	80 Joules
Actuation Type	Full sequential

Standard Accessories: 2 batteries, UC7SD charger, safety glasses, 4mm hex wrench, oil, carrying case

NT65GS
Cordless Straight Finish Nailer

Li-ion Battery 1.5Ah 60 min

- Lightweight, compact design
- 2 x 1.5Ah Li-Ion batteries
- 60 minute charger
- Adapter to charge batteries from a cigarette lighter socket
- Up to 1200 nails per fuel cell
- Tool free depth adjustment
- Dry firing lockout
- Easy to clean
- Tool free jam clearance
- No mark nose cap included

Nail Length	25-65mm
Nail Gauge	16 Gauge
Nail Type	Straight finish nails
Fuel Cell Capacity	Up to 1200 nails
Magazine Capacity	100 nails
Actuation Type	Full sequential
Dimensions (L x H)	260 x 278mm
Weight	1.8kg

Standard Accessories: 2 x 1.5Ah batteries, 60 minute charger, safety glasses, 2 hex wrenches, oil, nose cap, carrying case

NT65GB
Cordless Angled Finish Nailer

Li-ion Battery 1.5Ah 60 min

- Lightweight, compact design
- 2 x 1.5Ah Li-Ion batteries
- 60 minute charger
- Adapter to charge batteries from a cigarette lighter socket
- Up to 1200 nails per fuel cell
- Tool free depth adjustment
- Dry firing lockout
- Easy to clean
- Tool free jam clearance
- No mark nose cap included

Nail Length	32-65mm
Nail Gauge	16 Gauge
Nail Type	Angled finish nails
Fuel Cell Capacity	Up to 1200 nails
Magazine Capacity	100 nails
Actuation Type	Full sequential
Dimensions (L x H)	260 x 283mm
Weight	1.8kg

Standard Accessories: 2 x 1.5Ah batteries, 60 minute charger, safety glasses, 2 hex wrenches, oil, nose cap, carrying case

NC40G
Cordless Concrete Nailer

NiCad Battery 1.4Ah 60 min

- Lightweight, compact design
- 2 x 1.4Ah batteries
- 60 minute charger
- High driving power of 80J
- Up to 1200 nails per fuel cell
- Dry firing lockout
- Easy to clean
- Easy access fuel cell chamber

Nail Length/Diameter		15-40mm/2.6mm
Nail Type		Round head nails
Nail Collation		Plastic collated
Fuel Cell Capacity		Up to 1200 nails
Magazine Capacity		42 nails
Battery		2 x EB714S, 7.2V
1.4Ah NiCad		
Charge Time	60 minutes	
Working Power	80 Joules	
Actuation Type	Full sequential	
Dimensions (L x H)		420 x 352mm
Weight		3.7kg

Standard Accessories: 2 batteries, UC7SD charger, safety glasses, 4mm hex wrench, oil, carrying case

Second Fix Straight Finish Nails suitable for the NT65GS

Part number	Length	Gauge	Finish	Nail Quantity	Fuel Cells
705578	25	16 Gauge	ELGV	5000	4
705579	32	16 Gauge	ELGV	2500	2
705580	35	16 Gauge	ELGV	2500	2
705581	38	16 Gauge	ELGV	2500	2
705582	40	16 Gauge	ELGV	2500	2
705583	45	16 Gauge	ELGV	2500	2
705584	50	16 Gauge	ELGV	2500	2
705585	64	16 Gauge	ELGV	2500	2

Second Fix Angled Finish Nails suitable for the NT65GB

Part number	Length	Gauge	Angle	Finish	Nail Quantity	Fuel Cells
705586	32	16 Gauge	20°	ELGV	2000	2
705587	38	16 Gauge	20°	ELGV	2000	2
705588	45	16 Gauge	20°	ELGV	2000	2
705589	50	16 Gauge	20°	ELGV	2000	2
705590	63	16 Gauge	20°	ELGV	2000	2

First Fix Clipped Head Nails suitable for the NR90GC2

Part number	Length	Diameter	Ring/ Smooth	Finish	Nail Quantity	Fuel Cells
705550	50	2.9	Ring	Bright	3300	3
705551	50	2.9	Ring	ELGV	3300	3
705553	64	2.9	Ring	Bright	3300	3
705554	64	2.9	Ring	ELGV	3300	3
705555	64	2.9	Ring	HDGV	3300	3
705556	75	3.1	Ring	Bright	2200	2
705557	75	3.1	Ring	ELGV	2200	2
705558	75	3.1	Ring	HDGV	2200	2
705559	90	3.1	Smooth	Bright	2200	2
705560	90	3.1	Smooth	ELGV	2200	2
705561	90	3.1	Smooth	HDGV	2200	2

Concrete Nails suitable for the NC40G

Part number	Length	Diameter	Nail Quantity	Fuel Cells
40014401	20	2.6mm	1000	1
40014402	25	2.6mm	1000	1
40014403	30	2.6mm	1000	1
40014404	35	2.6mm	1000	1
40014405	40	2.6mm	1000	1

Fuel Cell Packs suitable for all Hitachi Cordless Gas Nailers

Part number	Size	Suitable for	Fuel Cells per Box
753600	40g	NR90GC2 NR90GR2 NC40G	12
753700	18g	NT65GS NT65GB	12

Spares & Accessories for cordless gas nailers

Part No	Description
885316	Top O ring (spare)
714810	Nailer lubricant (60cc)
714805	Brake cleaner (300ml)
714804	4mm T-bar hex wrench
885788	No mark contact element
885791	Rubber nose (tip only)
705470	Cleaning kit (includes lubricant, brush, brake cleaner, 4mm T-bar hex wrench, cleaning cloth, carrying case)

HITACHI
HITACHI





NV50AH
Coil Nailer

- Tool free adjustment of exhaust direction
- Tool free adjustment of drive depth
- Transparent magazine
- Piston reciprocating action
- Lightweight design

Collation System		Wire
Nail Size:	Length	27-50mm
	Diameter	1.8-2.3mm
	Head Diameter	4.6-4.8mm
Capacity		200-400 nails
Driving Speed		3 nails/sec
Operating Pressure Range		4.9-8.3bar (70-120psi)
Air Consumption		0.8litre/cycle at 6.9bar
Air Inlet		NPT 3/8 thread (PT 1/4)
Weight		1.4kg

Standard Accessories: Safety glasses, carrying case

NV50A1
Coil Nailer

- Convex coil type
- Piston reciprocating action

Nail Size:	Length	32-50mm
	Diameter	2.1mm
	Head Diameter	4.8mm
Capacity		400 nails
Driving Speed		3 nails/sec
Operating Pressure Range		4.9-8.3bar (70-120psi)
Air Inlet		NPT 3/8 thread (PT 1/4)
Weight		1.9kg

Standard Accessories: Safety glasses

NV90AB
Coil Nailer

- Tool free adjustment of exhaust direction
- Tool free adustment of drive depth
- Piston reciprocating action

Collation System		Wire
Nail Size:	Length	45-90mm
	Diameter	2.5-3.8mm
	Head Diameter	6.0-7.9mm
Capacity		150-300 nails
Driving Speed		3 nails/sec
Operating Pressure Range		4.9-8.3bar (70-120psi)
Air Consumption		1.9litre/cycle at 6.9bar
Air Inlet		NPT 3/8 thread (PT 1/4)
Dimensions (L x H)		292 x 389mm
Weight		3.0kg

Standard Accessories: Safety glasses, carrying case

NT50AE2K
Brad Nailer & Compressor Kit

- Comprises:
- NT50AE2 Brad Nailer
- EC58 Compressor
- 15m High Flow Hose

NT50AE2
Brad Nailer

- Tool free adjustment of exhaust direction
- Tool free adustment of drive depth
- No mark tip
- Narrow nose for confined spaces
- Piston reciprocating action

Nail Size:	Length	16-50mm
	Gauge	18 gauge
Capacity		100 brads
Operating Pressure Range		4.9-8.3bar (70-120psi)
Air Inlet		NPT 3/8 thread (PT 1/4)
Dimensions (L x H)		254 x 233mm
Weight		1.0kg

Standard Accessories: Safety glasses, wrench, oiler, nose cap

EC58
Compressor

- Oil free motor

Output Power	1.1hp (820W)
Capacity	6 Litres
Maximum Pressure	8bar (116psi)
Weight	8.2kg

QB35E
Wet/Dry Dust Extraction Unit

- Manual or automatic power switch allows suction to be controlled by a connected power tool
- Large 35 litre drum
- Run on facility ensures hose is clear

HITACHI
POWER TOOLS

Power Input		1100W
Switching power:	110V	900W
	230V	2000W
Drum Capacity		35 litres
Max Vacuum		220mm/bar
Max Suction Air Displacement		55 litres/sec
Weight		7kg

Standard Accessories: 3m x 35mm flexible hose, extension tubes and brushes, standard and multi connectors, filter cartridge, dust bag.

QB35E CONSUMABLES	
705061	Paper Dust Bag
705062	Cloth Filter Bag
706001	Air Cartridge Filter

Please contact your Hitachi Power Tools dealer for details of other QB35E accessories.

RB40VA
Blower/Vacuum

- Variable speed
- High efficiency fan
- Reversible nozzle for use as vacuum
- Soft grip wrap around handle
- External brush caps

Air Pressure (water column)	0-561mm
Air Volume	0-3.8m3/min
Power Input	550W
No-Load Speed	0-16000/min
Weight	1.7kg

Standard Accessories: Nozzle, dust bag.

3 HITACHI

YEAR

LITHIUM-ION TOOL

WARRANTY*

NOW INCLUDES 4.0Ah BATTERIES

Terms & conditions apply

Now more than ever, you need tools you can rely on.

Hitachi Power Tools offer an extended warranty on selected Li-Ion tools when registered within 4 weeks of purchase.
This now includes the full range of 4.0Ah Li-Ion tools, including 4.0Ah battery packs. Simply visit www.hitachi-powertools.co.uk and complete the registration form supplied.

What does the extended warranty cover?

We undertake to replace or repair any part found to be defective in material or workmanship, within 24 months (15 months for Hire Fleets) of delivery to the original purchaser.

What is not covered?

- Defects arising from neglect, misuse or accident, except as provided by statute.
- Accessories and other consumable items.
- NiCad and NiMH cordless tools and batteries

How do I get my tool repaired?

Contact your nearest Hitachi authorised service agent. You can find this on our website or by calling us on 01908 660663. You will need to provide your proof of purchase and warranty registration number to the service agent.

What Li-Ion tools are not covered by the warranty?

1.5Ah, 2.0Ah and 3.0Ah Li-Ion batteries are not covered by the warranty.
Cordless gas nailers are not covered by the extended warranty.
Promotional lines such as the DV18DCL2 are not covered.

Hitachi Power Tools (UK) Ltd

Precedent Drive, Rooksley, Milton Keynes, Buckinghamshire MK13 8PJ

Sales Enquiries
Telephone: 01908 354700
Fax: 01908 232868
Email: sales@hitachi-powertools.co.uk

General Enquiries
Telephone: 01908 660663
Fax: 01908 606642
Email: info@hitachi-powertools.co.uk

Internet: www.hitachi-powertools.co.uk
www.low-vibration.com

Your local dealer is:

A member of
EPTA
European Power Tool Association

POS306 5 2012